


CONTENTS

1. Feedy 123-S Charger
2. AC Power Cord

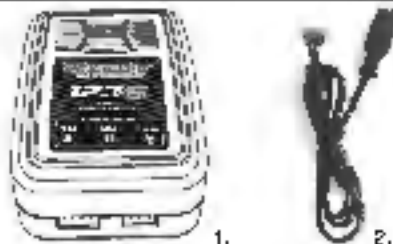

POWERING YOUR CHARGER

Insert the AC power cord into the charger, place the charger on a non-flammable surface, and then plug the AC power cord provided into an appropriate wall socket. When plugged in, all LEDs will light green and flash red at four second intervals indicating that the charger is ready to use.

CHARGING PROCEDURE

1. Connect the battery to the charger by plugging the battery's balance lead into the charge port using the 2S port for 2S batteries and the 3S port for 3S batteries. Place the battery in a fireproof container on a non-flammable surface.
2. The charge process will begin automatically, indicated by red Cell Status LEDs. When a 2S battery is connected, only 1S and 2S will illuminate. When a 3S battery is connected, all three LEDs will illuminate.
3. When the charging process is completed, the Cell Status LEDs will turn green. The charging process can be stopped at any time by removing the battery from the charger.
4. Disconnect the battery from the charger and start the charging procedure again to charge another battery or to re-charge your battery.
5. Unplug the charger from the wall socket when not in use.



CAUTION: NEVER LEAVE THE CHARGER AND BATTERY UNATTENDED DURING THE CHARGING PROCESS.

LED CHARGE STATUS

Determine a battery's charge status by viewing the Charge Status/Cell Status LEDs.

LED CHARGE STATUS		
Charge Status LED	Green/Red blinking	Ready to charge
	Red solid	Charging
	Green solid	Charging process complete

LED ERROR STATUS

If the charger detects an error, a code will be displayed by the Charge Status/Cell Status LEDs.

LED Status	Error Message	Solution
All flash red once in one second intervals	The battery is connected incorrectly	Re-connect battery correctly
All flash red twice in one second intervals	The charger is overloaded or has encountered a short circuit	Stop using the charger and return for repair
All flash red four times in one second intervals	The voltage of a single cell is above or below the limit	Discontinue use of the battery
All flash red six times in one second intervals	Individual cell voltages differ by more than 300mV	Discontinue use of the battery

WARRANTY

Your Feedy 123-S Compact Balance Charger is warranted to the original purchaser for 90 days from the date of purchase, verified by the sales receipt, against defects in material and workmanship. Product that has been mishandled, abused, used incorrectly, used for an application other than intended, or damaged by the user are not covered under warranty. Associated Electronics Inc. is not liable for any loss or damage, whether direct or indirect, incidental or consequential, or from any special situation, arising from the use, misuse, or abuse of this product.



Associated Electronics, Inc. declares that this product complies with the essential requirements and other relevant provisions of the European directive 2014/53/EU



The crossed-out wheeled bin means that within the European Union, this product must be taken to a separate waste collection facility at the product's end of life. Do not dispose of this product as unsorted municipal waste.



26021 Commerce Centre Dr., Lake Forest, CA 92650 USA • www.ReadyPower.com