
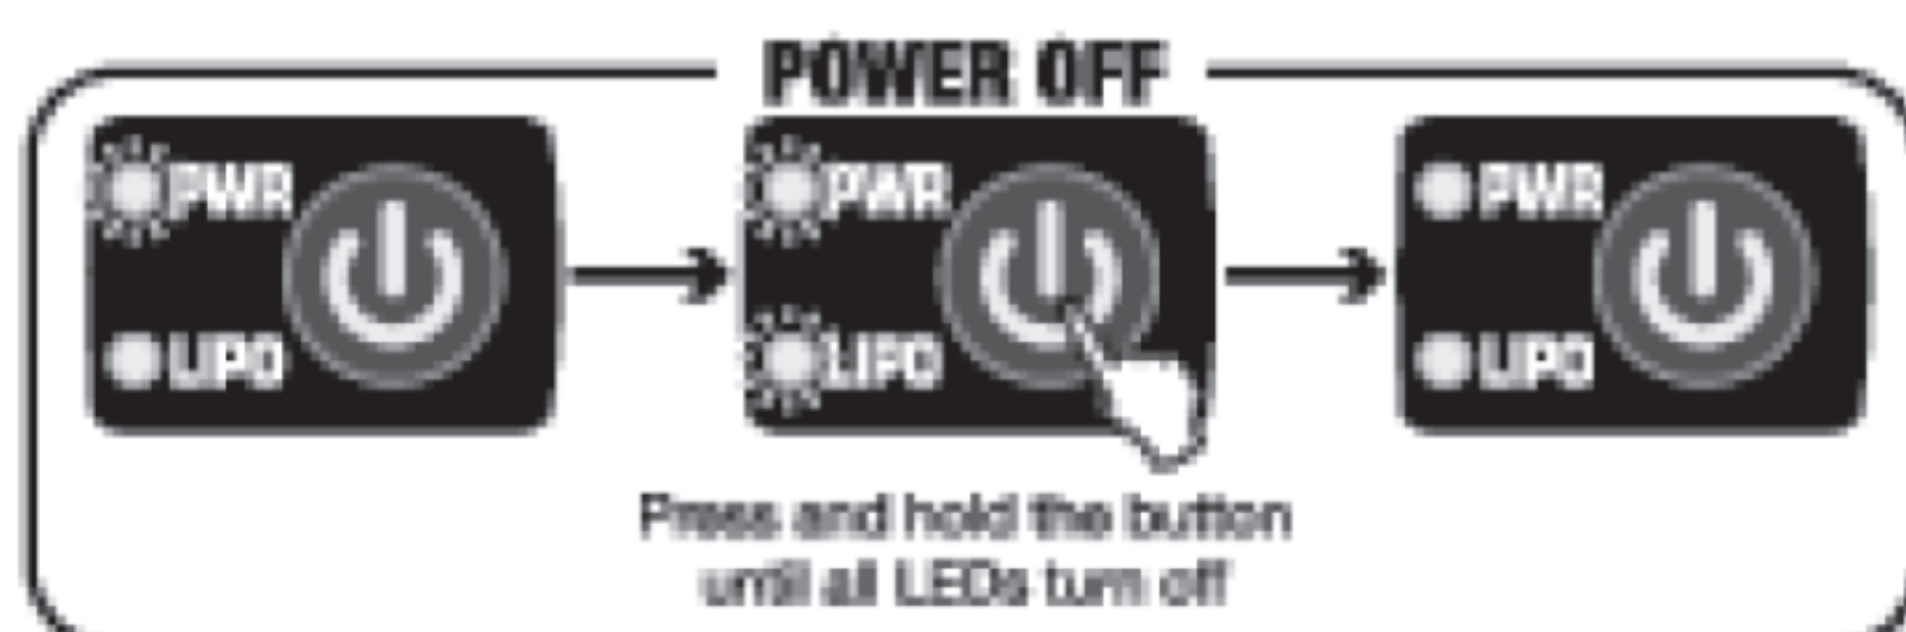


INSTALLATION

The switch can be installed in one of two ways. Option 1 is to use the included transponder mount which enables the switch to be mounted to the dedicated transponder mounting points found in many vehicles. Option 2 is to mount the switch in a convenient location using high-quality double-sided tape. Once mounted, plug the RX battery into the male switch plug and plug the female switch plug into your receiver's battery port.



NIMH OPERATION:

To power ON in NIMH mode, press and hold the power button for one second. The PWR LED will turn on. To power OFF, press and hold the power button until all LEDs turn off. When powered ON, the PWR LED's color will indicate the remaining battery capacity.

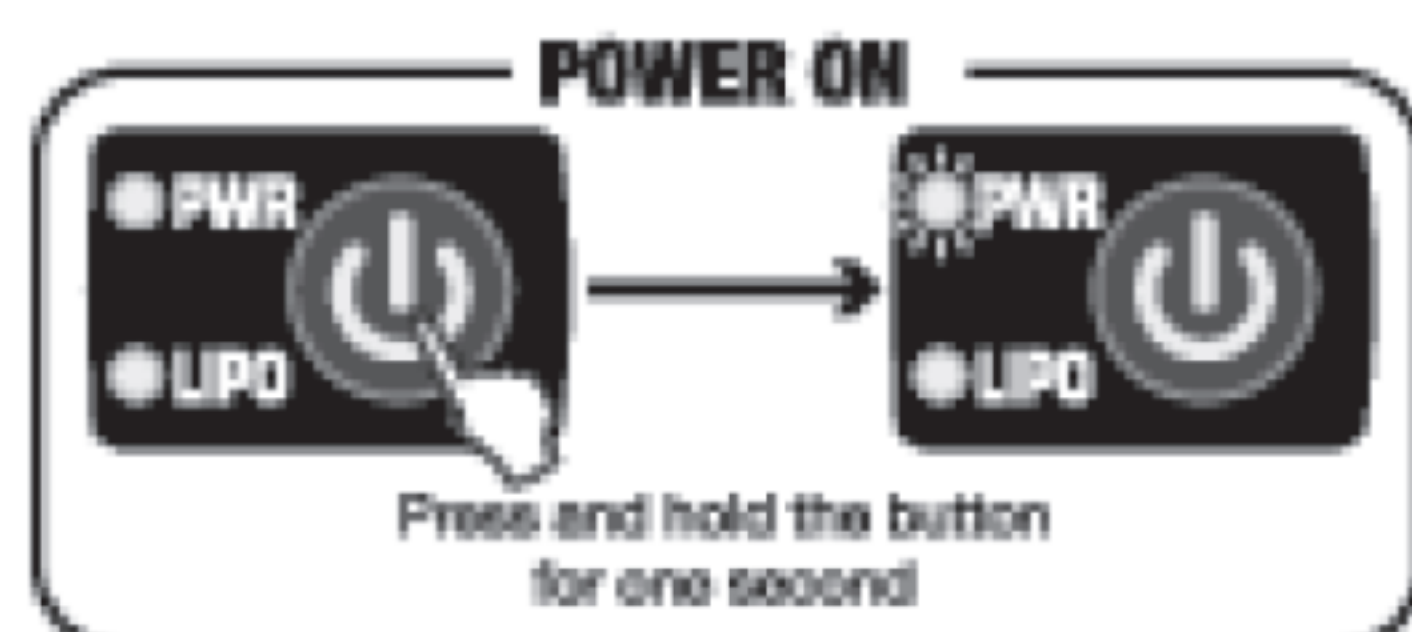

LiPo OPERATION:

To power ON in LiPo mode, press and hold the power button for more than 3 seconds. Both the PWR and LIPO LEDs will turn on. To power OFF, press and hold the power button until all LEDs turn off. When powered ON, the PWR LED's color will indicate the remaining battery capacity.

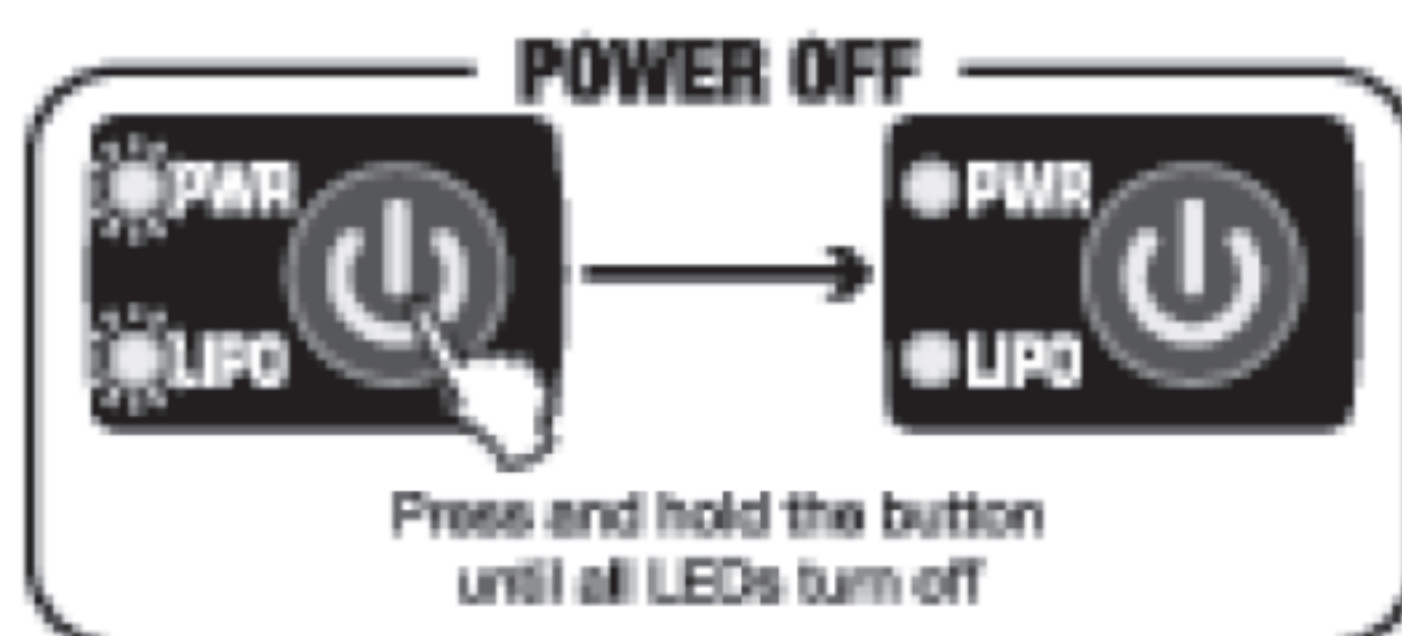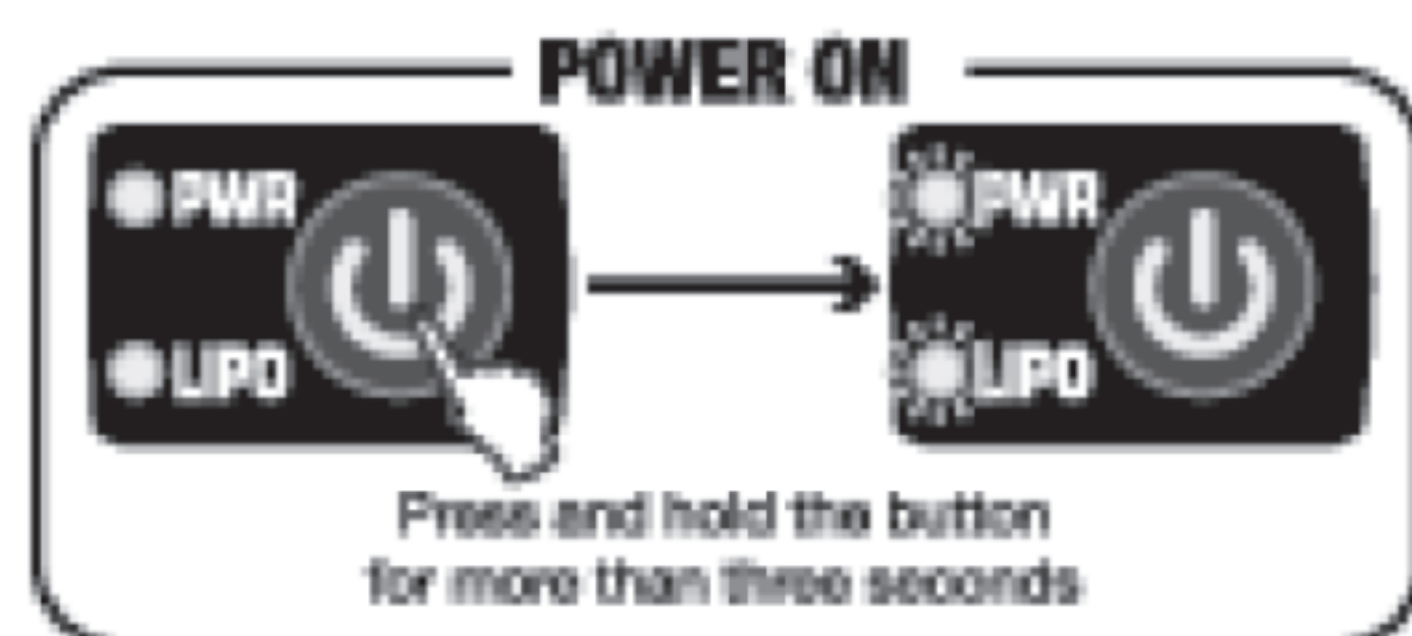

Associated Electrics, Inc. declares that this product complies with the essential requirements and other relevant provisions of the European directive 2014/30/EU.

The crossed-out wheeled bin means that within the European Union, this product must be taken to a separate waste collection facility at the product's end of life. Do not dispose of this product as unsorted municipal waste.