

1/10 ELECTRIC GT PANCAR

XRAY X10



INSTRUCTION MANUAL
FOR X10'26 & XP10 EDITION

BEFORE YOU START

This is a high-competition, high-quality RC car intended for persons aged 16 years and older with previous experience building and operating RC model racing cars. This is not a toy; it is a precision racing model. This model racing car is not intended for use by beginners, inexperienced customers, or by children without direct supervision of a responsible, knowledgeable adult. If you do not fulfill these requirements, please return the kit in unused and unassembled form back to the shop where you have purchased it.

Before building and operating your XRAY, **YOU MUST** read through all of the operating instructions and instruction manual and fully understand them to get the maximum enjoyment and prevent unnecessary damage.

Carefully read and fully understand the instructions before beginning assembly.

CUSTOMER SUPPORT

We have made every effort to make these instructions as easy to understand as possible. However, if you have any difficulties, problems, or questions, please do not hesitate to contact the XRAY support team at info@teamxray.com. Also, please visit our Web site at www.teamxray.com to find the latest updates, set-up information, option parts, and many other goodies. We pride ourselves on taking excellent care of our customers.

You can join thousands of XRAY fans and enthusiasts in our online community at: **WWW.
teamxray.com**

Make sure you review this entire manual, download and use set-up book from the Web, and examine all details carefully. If for some reason you decide this is not what you wanted or expected, do not continue any further. Your hobby dealer can not accept your kit for return or exchange after it has been partially or fully assembled.

Contents of the box may differ from pictures. In line with our policy of continuous product development, the exact specifications of the kit may vary without prior notice.

XRAY Europe

K Vystavisku 6992
91101 Trenčín
Slovakia, EUROPE
Phone: 421-32-7401100
Fax: 421-32-7401109
E-mail: info@teamxray.com

XRAY USA

RC America, 2030 Century Center Blvd #15 Irving, TX
75062
USA
Phone: (214) 744-2400
Fax: (214) 744-2401
E-mail: xray@rcamerica.com

FAILURE TO FOLLOW THESE INSTRUCTIONS WILL BE CONSIDERED AS ABUSE AND/OR NEGLECT.

SAFETY PRECAUTIONS

Contains:

LEAD (CAS 7439-92-1) ANTIMONY (CAS 7440-36-0)

WARNING: This product contains a chemical known to the state of California to cause cancer and birth defects or other reproductive harm.

CAUTION: CANCER HAZARD

Contains lead, a listed carcinogen. Lead is harmful if ingested. Wash thoroughly after using. DO NOT use product while eating, drinking or using tobacco products. May cause chronic effects to gastrointestinal tract, CNS, kidneys, and blood. MAY CAUSE BIRTH DEFECTS.

When building, using and/or operating this model always wear protective glasses and gloves.

Take appropriate safety precautions prior to operating this model. You are responsible for this model's assembly and safe operation! Please read the instruction manual before building and operating this model and follow all safety precautions. Always keep the instruction manual at hand for quick reference, even after completing the assembly. Use only genuine and original authentic XRAY parts for maximum performance. Using any third party parts on

this model will void warranty immediately.

Improper operation may cause personal and/or property damage. XRAY and its distributors have no control over damage resulting from shipping, improper construction, or improper usage. XRAY assumes and accepts no responsibility for personal and/or property damages resulting from the use of improper building materials, equipment and operations. By purchasing any item produced by XRAY, the buyer expressly warrants that he/she is in compliance with all applicable federal, state and local laws and regulation regarding the purchase, ownership and use of the item. The buyer expressly agrees to indemnify and hold harmless XRAY for all claims resulting directly or indirectly from the purchase, ownership or use of the product. By the act of assembling or operating this product, the user accepts all resulting liability. If the buyer is not prepared to accept this liability, then he/she should return this kit in new, unassembled, and unused condition to the place of purchase.

IMPORTANT NOTES - GENERAL

- This product is not suitable for children under 16 years of age without the direct supervision of a responsible and knowledgeable adult.
- Carefully read all manufacturers warnings and cautions for any parts used in the construction and use of your model.
- Assemble this kit only in places away from the reach of very small children.
- First-time builders and users should seek advice from people who have building experience in order to assemble the model correctly and to allow the model to reach its performance potential.
- Exercise care when using tools and sharp instruments.
- Take care when building, as some parts may have sharp edges.
- Keep small parts out of reach of small children. Children must not be allowed to put any parts in their mouth, or pull vinyl bag over their head.
- Read and follow instructions supplied with paints and/or cement, if used (not included in kit).
- Immediately after using your model, do NOT touch equipment on the model such as the motor and speed controller, because they generate high temperatures. You may seriously burn yourself seriously touching them.
- Follow the operating instructions for the radio equipment at all times.
- Do not put fingers or any objects inside rotating and moving parts, as this may cause damage or serious injury as your finger, hair, clothes, etc. may get caught.
- Be sure that your operating frequency is clear before turning on or running your model, and never share the same frequency with somebody else at the same time. Ensure that others are aware of the operating frequency you are using and when you are using it.
- Use a transmitter designed for ground use with RC cars. Make sure that no one else is using the same frequency as yours in your operating area. Using the same frequency at the same time, whether it is driving, flying or sailing, can cause loss of control of the RC model, resulting in a serious accident.
- Always turn on your transmitter before you turn on the receiver in the car. Always turn off the receiver before turning your transmitter off.
- Keep the wheels of the model off the ground when checking the operation of the radio equipment.
- Disconnect the battery pack before storing your model.
- When learning to operate your model, go to an area that has no obstacles that can

damage your model if your model suffers a collision.

- Remove any sand, mud, dirt, grass or water before putting your model away.
- If the model behaves strangely, immediately stop the model, check and clear the problem.
- To prevent any serious personal injury and/or damage to property, be responsible when operating all remote controlled models.
- The model car is not intended for use on public places and roads or areas where its operation can conflict with or disrupt pedestrian or vehicular traffic.
- Because the model car is controlled by radio, it is subject to radio interference from many sources that are beyond your control. Since radio interference can cause momentary loss of control, always allow a safety margin in all directions around the model in order to prevent collisions.
- Do not use your model:
 - Near real cars, animals, or people that are unaware that an RC car is being driven.
 - In places where children and people gather
 - In residential districts and parks
 - In limited indoor spaces
 - In wet conditions
 - In the street
 - In areas where loud noises can disturb others, such as hospitals and residential areas.
 - At night or anytime your line of sight to the model may be obstructed or impaired in any way.

To prevent any serious personal injury and/or damage to property, please be responsible when operating all remote controlled models.



IMPORTANT NOTES – ELECTRICAL

- Insulate any exposed electrical wiring (using heat shrink tubing or electrical tape) to prevent dangerous short circuits. Take maximum care in wiring, connecting and insulating cables. Make sure cables are always connected securely. Check connectors for if they become loose. And if so, reconnect them securely. Never use RC models with damaged wires. A damaged wire is extremely dangerous, and can cause short-circuits resulting in fire. Please have wires repaired at your local hobby shop.
- Low battery power will result in loss of control. Loss of control can occur due to a weak battery in either the transmitter or the receiver. Weak running battery may also result in an out of control car if your car's receiver power is supplied by the running battery. Stop operation immediately if the car starts to slow down.
- When not using RC model, always disconnect and remove battery.
- Do not disassemble battery or cut battery cables. If the running battery short-circuits, approximately 300W of electricity can be discharged, leading to fire or burns. Never disassemble battery or cut battery cables.
- Use a recommended charger for the receiver and transmitter batteries and follow the instructions correctly. Over-charging, incorrect charging, or using inferior chargers can cause the batteries to become dangerously hot. Recharge battery when necessary. Continual recharging may damage battery and, in the worst case, could build up heat

leading to fire. If battery becomes extremely hot during recharging, please ask your local hobby shop for check and/or repair and/or replacement.

- Regularly check the charger for potential hazards such as damage to the cable, plug, casing or other defects. Ensure that any damage is rectified before using the charger again. Modifying the charger may cause short-circuit or overcharging leading to a serious accident. Therefore do not modify the charger.
- Always unplug charger when recharging is finished.
- Do not recharge battery while battery is still warm. After use, battery retains heat. Wait until it cools down before charging.
- Do not allow any metal part to short circuit the receiver batteries or other electrical/electronic device on the model.
- Immediately stop running if your RC model gets wet as may cause short circuit.
- Please dispose of batteries responsibly. Never put batteries into fire.

R/C & BUILDING TIPS

- Make sure all fasteners are properly tightened. Check them periodically.
- Make sure that chassis screws do not protrude from the chassis.
- For the best performance, it is very important that great care is taken to ensure the free movement of all parts.
- Clean all ball-bearings so they move very easily and freely.
- Tap or pre-thread the plastic parts when threading screws.
- Self-tapping screws cut threads into the parts when being tightened. Do not use excessive force when tightening the self-tapping screws because you may strip out the thread in the plastic. We recommended you stop tightening a screw when you feel some resistance.
- Ask your local hobby shop for any advice.

WARRANTY

XRAY guarantees this model kit to be free from defects in both material and workmanship within 30 days of purchase. The total monetary value under warranty will in no case exceed the cost of the original kit purchased. This warranty does not cover any components damaged by use or modification or as a result of wear. Part or parts missing from this kit must be reported within 30 days of purchase. No part or parts will be sent under warranty without proof of purchase. Should you find a defective or missing part, contact the local distributor. Service and customer support will be provided through local hobby store where you have purchased the kit, therefore make sure to purchase any XRAY products at your local hobby store. This model racing car is considered to be a high-performance racing vehicle. As such this vehicle will be used in an extreme range of conditions and situations, all which may cause premature wear or failure of any component. XRAY has no control over usage of vehicles once they leave the dealer, therefore XRAY can only offer warranty against all manufacturer's defects in materials, workmanship, and assembly at point of sale and before use. No warranties are expressed or implied that cover damage caused by what is considered normal use, or cover or imply how long any model cars' components or electronic components will last before requiring replacement.

Due to the high performance level of this model car you will need to periodically maintain and replace consumable components. Any and all warranty coverage will not cover replacement of any part or component damaged by neglect, abuse, or improper or unreasonable use. This includes but is not limited to damage from crashing, chemical and/or water damage, excessive moisture, improper or no maintenance, or user modifications which compromise the integrity of components. Warranty will not cover components that are considered consumable on RC vehicles. XRAY does not pay nor refund shipping on any

Please support your local hobby shop. We at XRAY Model Racing Cars support all local hobby dealers. Therefore we ask you, if at all possible, to purchase XRAY products at your hobby dealer and give them your support like we do. If you have difficulty finding XRAY products, please check out www.teamxray.com to get advice, or contact us via email at info@teamxray.com, or contact the XRAY distributor in your country.

component sent to XRAY or its distributors for warranty. XRAY reserves the right to make the final determination of the warranty status of any component or part.

Limitations of Liability

XRAY makes no other warranties expressed or implied. XRAY shall not be liable for any loss, injury or damages, whether direct, indirect, special, incidental, or consequential, arising from the use, misuse, or abuse of this product and/or any product or accessory required to operate this product. In no case shall XRAY's liability exceed the monetary value of this product.

Take adequate safety precautions prior to operating this model. You are responsible for this model's assembly and safe operation.

Disregard of the any of the above cautions may lead to accidents, personal injury, or property damage. XRAY MODEL RACING CARS assumes no responsibility for any injury, damage, or misuse of this product during assembly or operation, nor any addictions that may arise from the use of this product.
All rights reserved.

QUALITY CERTIFICATE

XRAY MODEL RACING CARS uses only the highest quality materials, the best compounds for molded parts and the most sophisticated manufacturing processes of TQM (Total Quality Management). We guarantee that all parts of a newly-purchased kit are manufactured with the highest regard to quality. However, due to the many factors inherent in model racecar competition, we cannot guarantee any parts once you start racing the car. Products which

have been worn out, abused, neglected or improperly operated will not be covered under warranty.

We wish you enjoyment of this high-quality and high-performance RC car and wish you best success on the track!

In line with our policy of continuous product development, the exact specifications of the kit may vary. In the unlikely event of any problems with your new kit, you should contact the model shop where you purchased it, quoting the part number.
We do reserve all rights to change any specification without prior notice. All rights reserved.

TOOLS REQUIRED



Side Cutters
(HUDY #189010)



Pocket Hobby Knife
(HUDY #188981)



Special Tool for Turnbuckles, Nuts (HUDY #181090)



Turnbuckle Wrench 3mm (HUDY #181030)



Turnbuckle Wrench 4mm (HUDY #181040)



HUDY Tweezers Straight (HUDY #188970)



HUDY Tweezers Curved (HUDY #188971)

Allen 1.5mm (#111545 - HUDY EXCLUSIVE Limited Edition)



Allen 2.0mm (#112045 - HUDY EXCLUSIVE Limited Edition)



Allen 2.5mm (#112545 - HUDY EXCLUSIVE Limited Edition)



Allen 3.0mm (#113045 - HUDY EXCLUSIVE Limited Edition)



Socket 7.0mm (#177035 - HUDY EXCLUSIVE Limited Edition)



Socket 5.5mm (#175535 - HUDY EXCLUSIVE Limited Edition)



Reamer (#107602 - HUDY EXCLUSIVE Limited Edition)



Blade Hobby Knife with Alu Handle (HUDY #188980)



Professional Multi-Tool
(HUDY #183011)

INCLUDED

* Kit includes smaller but sufficient amount of oil and grease to build the car.

700cSt (#106370)
HUDY Premium
Silicone Oils



10.000cSt (#106510)
HUDY Premium
Silicone Oils



Differential Grease
(HUDY #106211)



ALSO REQUIRED

Transmitter



Receiver



Speed Controller



Steering Servo



Bearing Oil
(HUDY #106230)



Electric Motor & Pinion Gear
with Setscrew



LiPo Battery



Battery Charger



Tires



Threadlock



1/10 GT Bodyshell



X10

1/10 XP10 Bodyshell



XPT10

Lexan™ Paint



Double-sided Tape
(HUDY #107875)



CA glue





VIDEO TECH TIP



Alexander Hagberg (Factory Driver)

When a QR CODE is found in the instruction manual, scan the code to be directed to an online video that explains that feature or adjustment in more detail. Make sure to watch all of the instructional videos to get the most performance out of your car. The Tech Tips videos that you can scan in this instruction manual and watch are for X12. Therefore, it is important to use these videos for X10 as information and as an extra aid to understand the correct settings, but you must not take it completely into detail.

**SAMPLE OF OPTIONAL PARTS**

#37XXXX	TYPE1	OPTION 1
#37XXXX	TYPE2	OPTION 2
#37XXXX	TYPE	INCLUDED
#37XXXX	TYPE3	OPTION 3

XRAY offers wide range of optional tuning parts which are listed in a table like this. Please refer to the exploded view of each main section to verify which part is included in the kit while all other parts are available only as an optional part and must be purchased separately.

COLOR INDICATIONS

At the beginning of each section is an exploded view of the parts to be assembled. There is also a list of all the parts and part numbers that are related to the assembly of that section.

The part descriptions are color-coded to make it easier for you to identify the source of a part. Here are what the different colors mean:

375220


371025

378102

375002

STYLE A - indicates parts that are included in the bag marked for the section.**STYLE B** - indicates parts that are included in the box.**STYLE C** - indicates parts that are already assembled from previous steps.**STYLE D** - indicates parts that are optional.**CARBON PARTS PREPARATION****TIP**

PREPARE ALL CARBON PARTS
To protect and seal edges of carbon parts, sand edges smooth and then apply CA glue.

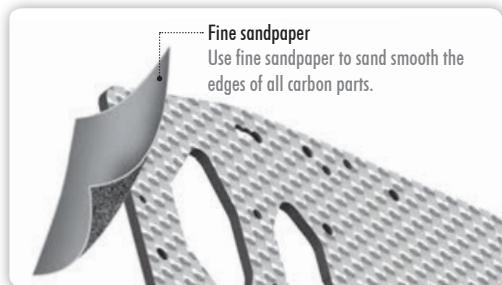

XRAY uses the highest quality USA-made carbon fiber sheets available on the market. The carbon fiber sheets are pressed, and this production technique may result in slight variations in each sheet's thickness and flatness. The carbon manufacturer cannot and does not guarantee perfect uniformity as it is impossible to ensure each plate's perfect flatness with such thin material thicknesses.

These tolerances for thickness and flatness are taken into consideration when designing our XRAY cars and parts. Minor irregularities in the carbon fiber parts will not affect the performance of XRAY vehicles once assembled with the other components. While an individual carbon fiber part itself may not lay perfectly flat, rest assured that the assembled vehicle will still perform as designed and intended.


TIP

All ball-bearings are factory pre-oiled. Regularly service, clean and lubricate all ball-bearings with **HUDY Bearing Oil (#106230)**. Replace any bearings that develop a "gritty" feeling to prevent inefficiency and avoid rear axle bearing blowouts.

Make sure to use only original XRAY ball-bearings, which all have specific tolerances, axial and radial play, and are all individually selected. Using 3rd party ball-bearings may result in failures and damage to other parts.



1. FRONT SUSPENSION



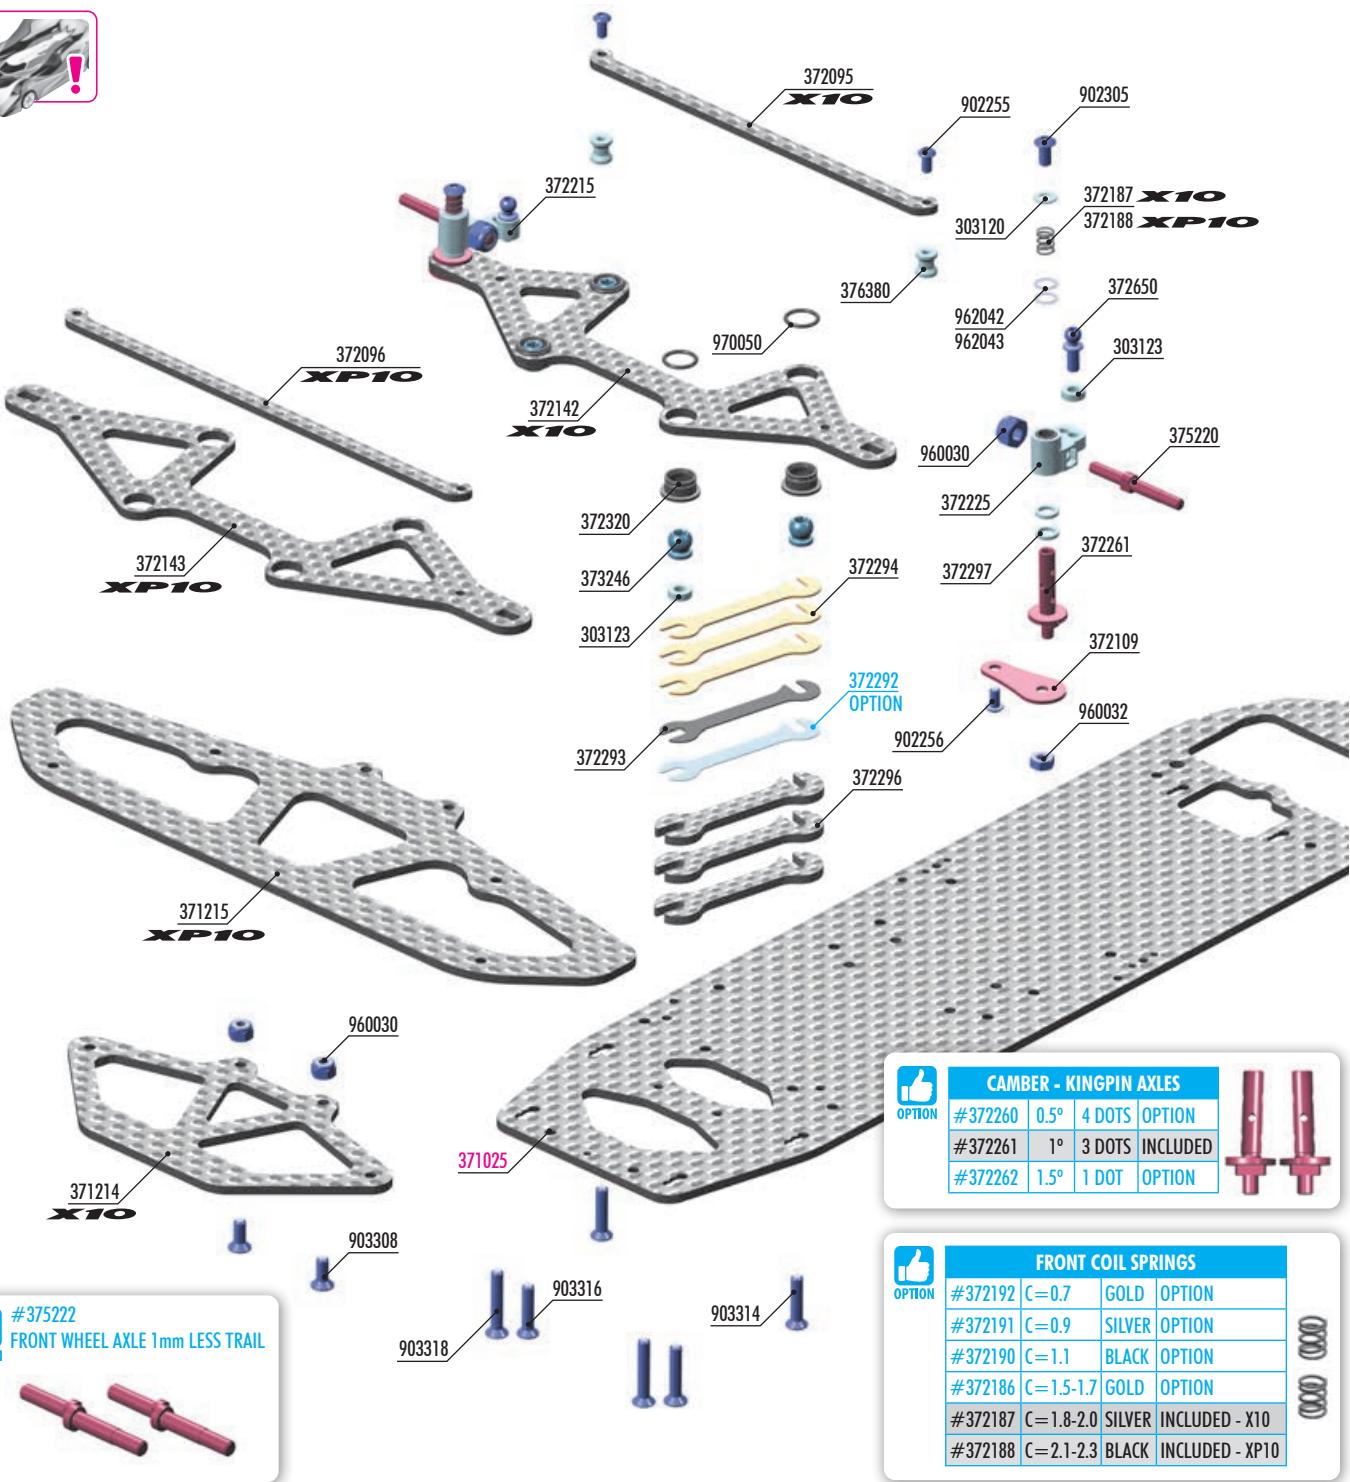


 OPTION	CAMBER - KINGPIN AXLES		
#372260	0.5°	4 DOTS	OPTION
#372261	1°	3 DOTS	INCLUDED
#372262	1.5°	1 DOT	OPTION

FRONT COIL SPRINGS				
OPTION	#372192	C=0.7	GOLD	OPTION
	#372191	C=0.9	SILVER	OPTION
	#372190	C=1.1	BLACK	OPTION
	#372186	C=1.5-1.7	GOLD	OPTION
	#372187	C=1.8-2.0	SILVER	INCLUDED - X10
	#372188	C=2.1-2.3	BLACK	INCLUDED - XP10

303120	SET OF ALU SHIM (0.5mm, 1.5mm, 2.5mm)	372650	BALL END 4.2mm WITH 6MM THREAD (2)
303123	ALU SHIM 3x6x2.0mm (10)	373246	ALU BALL END 6.0mm WITH HEX - SWISS 7075 T6 (2)
371214	X10 CARBON BUMPER LOWER HOLDER FOR 1-PIECE CHASSIS	375220	FRONT WHEEL AXLE (2)
371215	XP10 CARBON BUMPER LOWER HOLDER FOR 1-PIECE CHASSIS	376380	ALU MOUNT 6.0mm WITH M2.5 THREAD - BLACK (2)
372095	X10 CARBON FRONT BRACE FOR 1-PIECE CHASSIS		
372096	XP10 CARBON FRONT BRACE FOR 1-PIECE CHASSIS	902255	HEX SCREW SH M2.5x5 (10)
372109	STEEL LOWER SUSPENSION ARM BRACE (2)	902256	HEX SCREW SH M2.5x6 (10)
372142	X10 CARBON LOWER SUSPEN. ARM PLATE FOR 1-PIECE CHASSIS	902305	HEX SCREW SH M3x5 (10)
372143	XP10 CARBON LOWER SUSPEN. ARM PLATE FOR 1-PIECE CHASSIS	903308	HEX SCREW SFH M3x8 (10)
372187	FRONT COIL SPRING FOR 4mm PIN C=1.8-2.0 - SILVER (2)	903314	HEX SCREW SFH M3x14 (10)
372188	FRONT COIL SPRING FOR 4mm PIN C=2.1-2.3 - BLACK (2)	903316	HEX SCREW SFH M3x16 (10)
372215	ALU STEERING BLOCK WITH TEFILON SLEEVE - RIGHT	903318	HEX SCREW SFH M3x18 (10)
372225	ALU STEERING BLOCK WITH TEFILON SLEEVE - LEFT	960030	NUT M3 (10)
372261	KINGPIN 4mm WITH HOLES - 1.0° - 3 DOTS - NICKEL COATED (2)	960032	NUT M3 - BLACK (10)
372292	STEEL SHIM 0.2mm - SILVER (2) OPTION	962042	WASHER S 4x6x0.1 (10)
372293	STEEL SHIM 0.4mm - BLACK (2)	962043	WASHER S 4x6x0.2 (10)
372294	STEEL SHIM 0.6mm - GOLD (2)	970050	O-RING 5x1 (10)
372296	CARBON RIDE HEIGHT SHIM 2.5mm (2)		
372297	ALU SHIM 4x6x1.0mm (10)	371025	CARBON 1-PIECE CHASSIS 2.5mm
372320	COMPOSITE ARM BUSHING (4)		

Numbers in parentheses () refer to quantities when purchased separately.

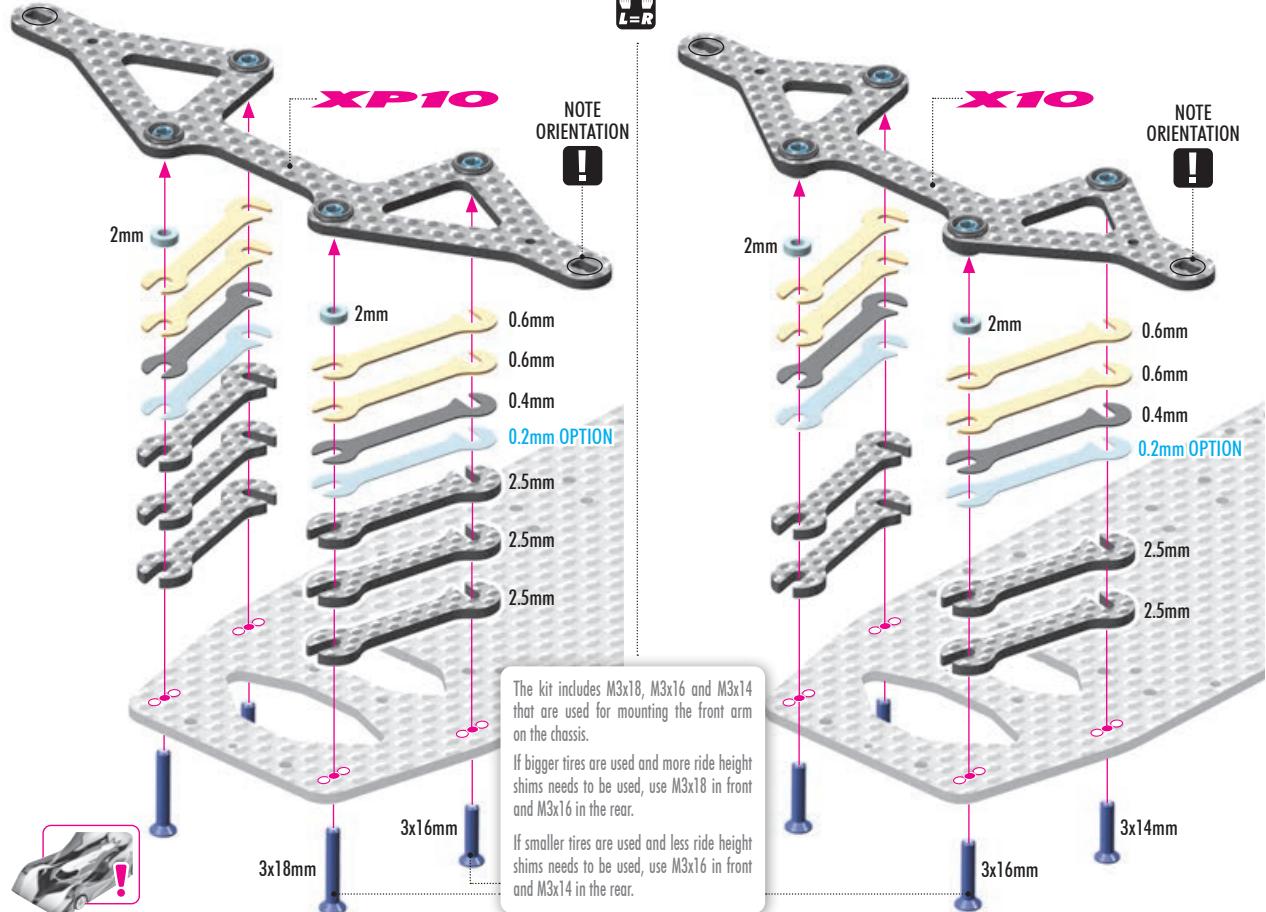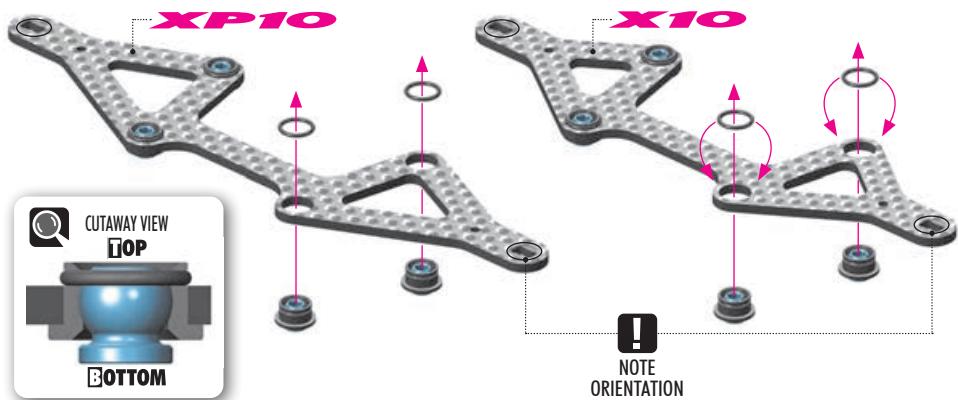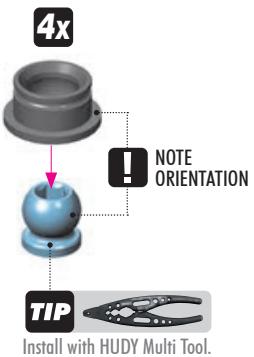

RIDE HEIGHT & CASTER ADJUSTMENT

The number of washers and shims used affects the ride height and caster of the car, so determine the proper amount of shimming based on tire diameter and desired caster angle.

INITIAL SETTING

- 1x** 0.4mm - BLACK
- 2x** 0.6mm - GOLD
- 2x** 2.5mm - CARBON
- 3x** 2.5mm - CARBON




VIDEO TECH TIP



CASTER ADJUSTMENT SETTING

Caster is adjusted by the shims placed under front ball. Please see the table on right to understand how to set the caster.

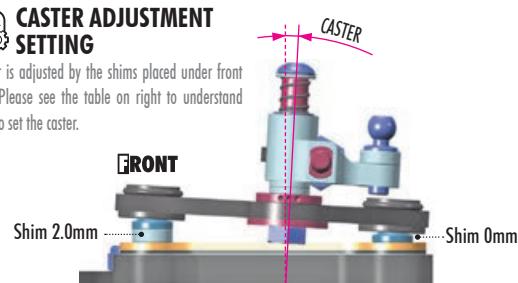


EXTRA SHIM UNDER FRONT BALL	CASTER	
	SHIM DIFFERENCE	CASTER
1mm	1.5°	
2mm	3°	
3mm	4.5°	
4mm	6°	
5mm	7.5°	

- MORE CASTER increases front traction, especially on-power. More likely to traction roll.
- LESS CASTER reduces front traction, especially on-power. Less likely to traction roll.

ALTERNATIVE REAR POSITION SHORT WHEELBASE

Shorter wheelbase allows the car to rotate better in corners to maintain cornering speed. Recommended for tight, technical tracks or tracks with numerous 180° hairpin corners.




ALTERNATIVE FRONT POSITION LONG WHEELBASE

Longer wheelbase is recommended for bigger tracks with longer sweepers. Makes the car more stable and easier to drive.

1. FRONT SUSPENSION



SOFT NO BRACE

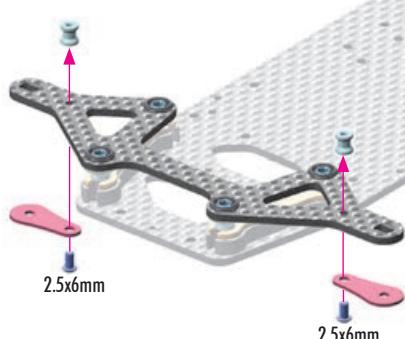


SOFT - (NO BRACE)

Makes the car initially less responsive, but will provide more mechanical traction. Recommended for low-friction carpet conditions and asphalt tracks.

FRONT SUSPENSION FLEX SETTING


MEDIUM 1x BRACE

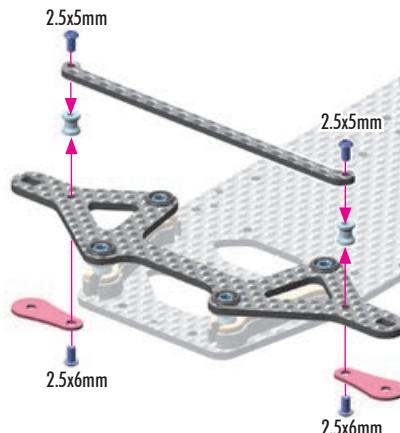

MEDIUM ✓ INITIAL SETTING

Brace mounted to the carbon arm with posts provides a balance between initial response and mechanical traction. Recommended for most track conditions.

STIFF 2x BRACES

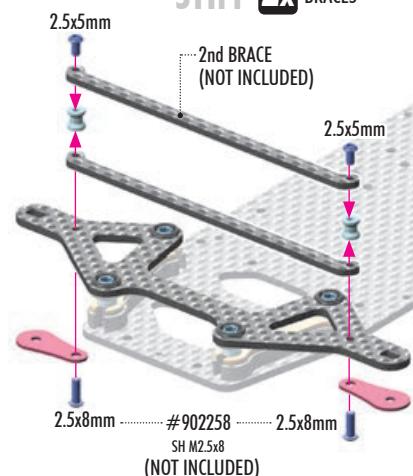

STIFF

Both braces mounted to the carbon arm give maximum responsiveness but decrease mechanical traction. Recommended for high-friction track conditions. The second Brace is NOT INCLUDED.




2x

The steering link mounting position on the steering block has a direct effect on the Ackermann. Please see the ACKERMANN SETTING PAGE: 27.



RIGHT

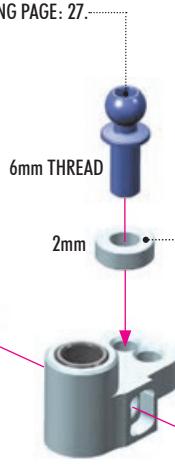

M3

LEFT

NOTE ORIENTATION


BUMPSTEER SETTING

The thickness of shims changes the steering linkage angle. Thicker shims give decreased in-corner steering, but car becomes easier to drive.


Use 2mm bump steer as
✓ INITIAL SETTING



#375222 FRONT WHEEL AXLE 1mm LESS TRAIL

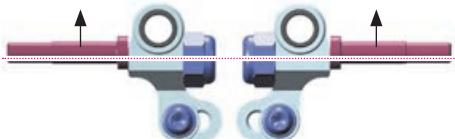


Less front axle trail frees up the car and reduces front traction, improving cornering speed for all classes. It is particularly useful for spec classes on high traction black carpet.

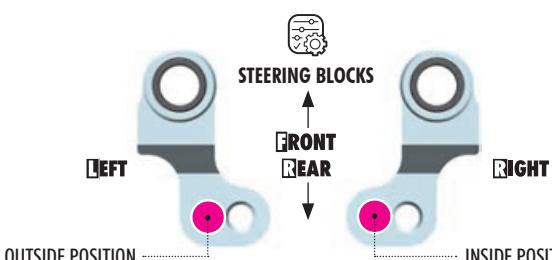


The outer hole provides less Ackermann effect, making the car more aggressive. Front traction is increased.

INSIDE POSITION
✓ INITIAL SETTING

The inner hole provides more Ackermann effect, making the car less aggressive and easier to drive. Front traction is decreased.

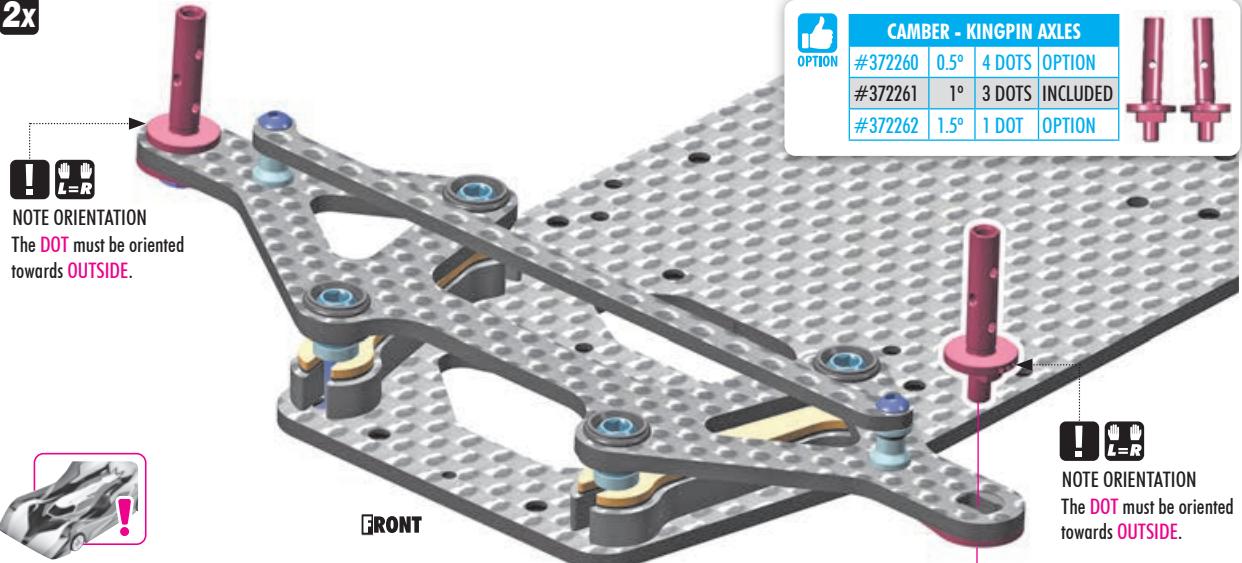
2x

CAMBER - KINGPIN AXLES

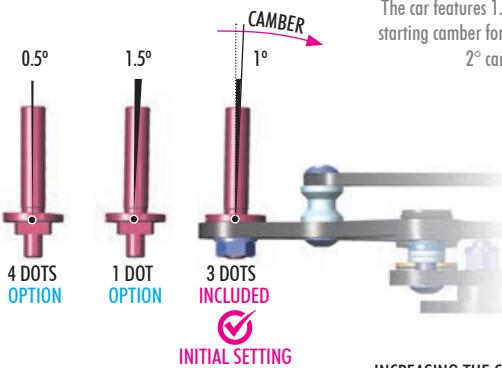
#372260	0.5°	4 DOTS	OPTION
#372261	1°	3 DOTS	INCLUDED
#372262	1.5°	1 DOT	OPTION


CAMBER ADJUSTMENT


The car features 1.5° angled king pin axles which are the recommended starting camber for most tracks and traction conditions. There are 1° and 2° camber king pin axles optionally available.

FRONT VIEW
INCREASING THE CAMBER ANGLE

will increase the car steering, however, will make the car more difficult to drive.

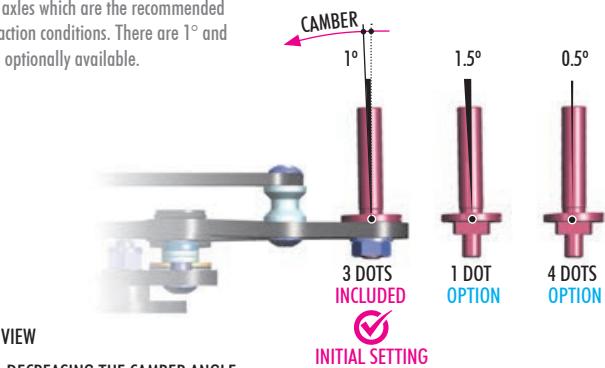
DECREASING THE CAMBER ANGLE

will decrease the steering which will make the car easier to drive and also helps to prevent traction rolling.

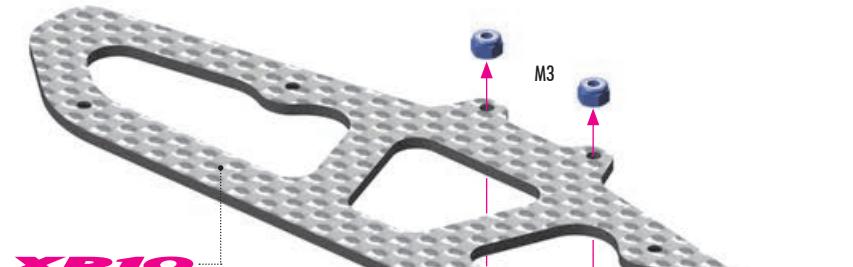

1. FRONT SUSPENSION



2x 303120
SHIM 3x6x0.5



4x 372297
SHIM 4x6x1



2x 902305
SH M3x5



2x 962042
S 4x6x0.1



2x 962043
S 4x6x0.2



TIP


Alexander Hagberg
(Factory driver)

RIDE HEIGHT AND DROOP ADJUSTMENT SHIMS:

Ride height is adjusted with the supplied long shims (silver, black, gold) that can be placed under the arms. I recommend using the lowest possible ride height, unless the track surface is very bumpy or rough. In that case, the car can benefit from having a slightly higher ride height which will help to increase stability and improve handling over bumps.

The front axle height can be adjusted with shims under the steering block. You cannot change the roll center at the front of the because X10'26 & XP10'26 there is no upper arm. Adding shims under the steering block – which raises the steering block – will raise the front axle height, and at the same time will decrease bump steer. Removing shims will lower the steering block and increase bump steer.

I recommend using the kit shimming for the front steering block as a good basic setting for most conditions.

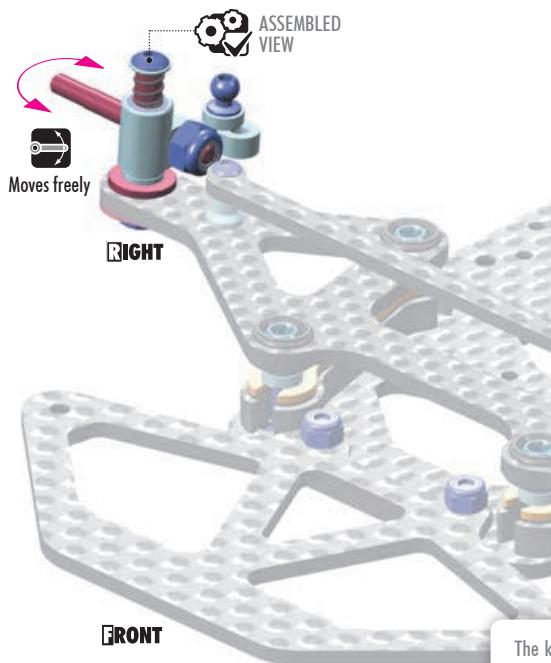

OPTION	FRONT COIL SPRINGS		
#372192	C=0.7	GOLD	OPTION
#372191	C=0.9	SILVER	OPTION
#372190	C=1.1	BLACK	OPTION
#372186	C=1.5-1.7	GOLD	OPTION
#372187	C=1.8-2.0	SILVER	INCLUDED - X10
#372188	C=2.1-2.3	BLACK	INCLUDED - XP10

SOFTER SPRINGS

Make the car easier to drive over bumps and increase steering as they make the car roll more, especially in the middle of a corner.

HARDER SPRINGS

Make the car more responsive and increase initial steering. Recommended for high-traction and flat tracks.



FRONT DROOP ADJUSTMENT

Front droop is adjusted by the preload of the front spring. More shims between the steering block and the spring will increase preload - and decrease droop. Removing shims will have the opposite effect.

INITIAL SETTING


- Above steering block (0.3mm)
- Below steering block (2.0mm)

MORE DROOP will make the car initially less responsive, but it will give the car more front traction, especially in the middle of the corner. The car will be less precise and more difficult to drive, because of increased roll. More droop is best suited for low- to medium-traction carpet, or asphalt tracks.

LESS DROOP will decrease roll but the car will change direction faster. Less droop is best suited for high-traction surfaces such as US black carpet, especially when traction rolling is an issue and particularly when a rear solid axle is used.



INITIAL SETTING

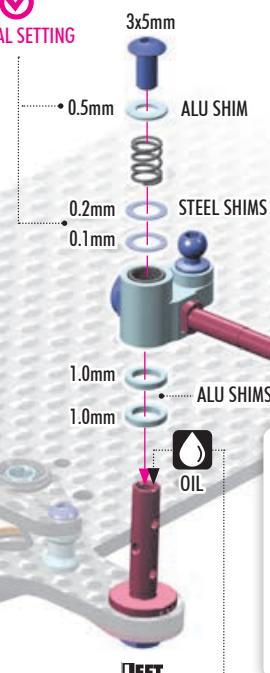

The thickness of the shims used affects the **RIDE HEIGHT** and **FRONT DROOP** of the front suspension, so determine the proper amount of shims based on tire diameter and desired droop.

The kingpins with hole maintain consistent dampening from the continuous oil film between the kingpin and steering block. Fill the kingpin from the top before installing the steering block and retaining screw.

Recommended to check and re-fill the kingpin fluid once per race day, or every 5 runs, whichever comes first.

LOW traction & bumpy track

7K ~ 10K cSt



HIGH traction & smooth track

15K ~ 30K cSt

use HUDY Silicone Oil
10K cSt
(INCLUDED)



FRONT DAMPING SETTING

The Front Damping Setting is adjusted using different viscosity of oils.

THINNER OIL

Makes the car more responsive but also more difficult to drive. Thinner oil increases cornering speed. Recommended for low-traction tracks.

THICKER OIL

Makes the car less responsive but easier to drive. Thicker oil also increases stability, but decreases cornering speed. Recommended for high-traction tracks.



2x 303120
SHIM 3x6x0.5



4x 372297
SHIM 4x6x1



2x 902305
SH M3x5



2x 962042
S 4x6x0.1



2x 962043
S 4x6x0.2



VIDEO TECH TIP



FRONT KINGPIN OIL




VIDEO TECH TIP



FRONT DROOP & RIDE
HEIGHT

2. REAR SUSPENSION

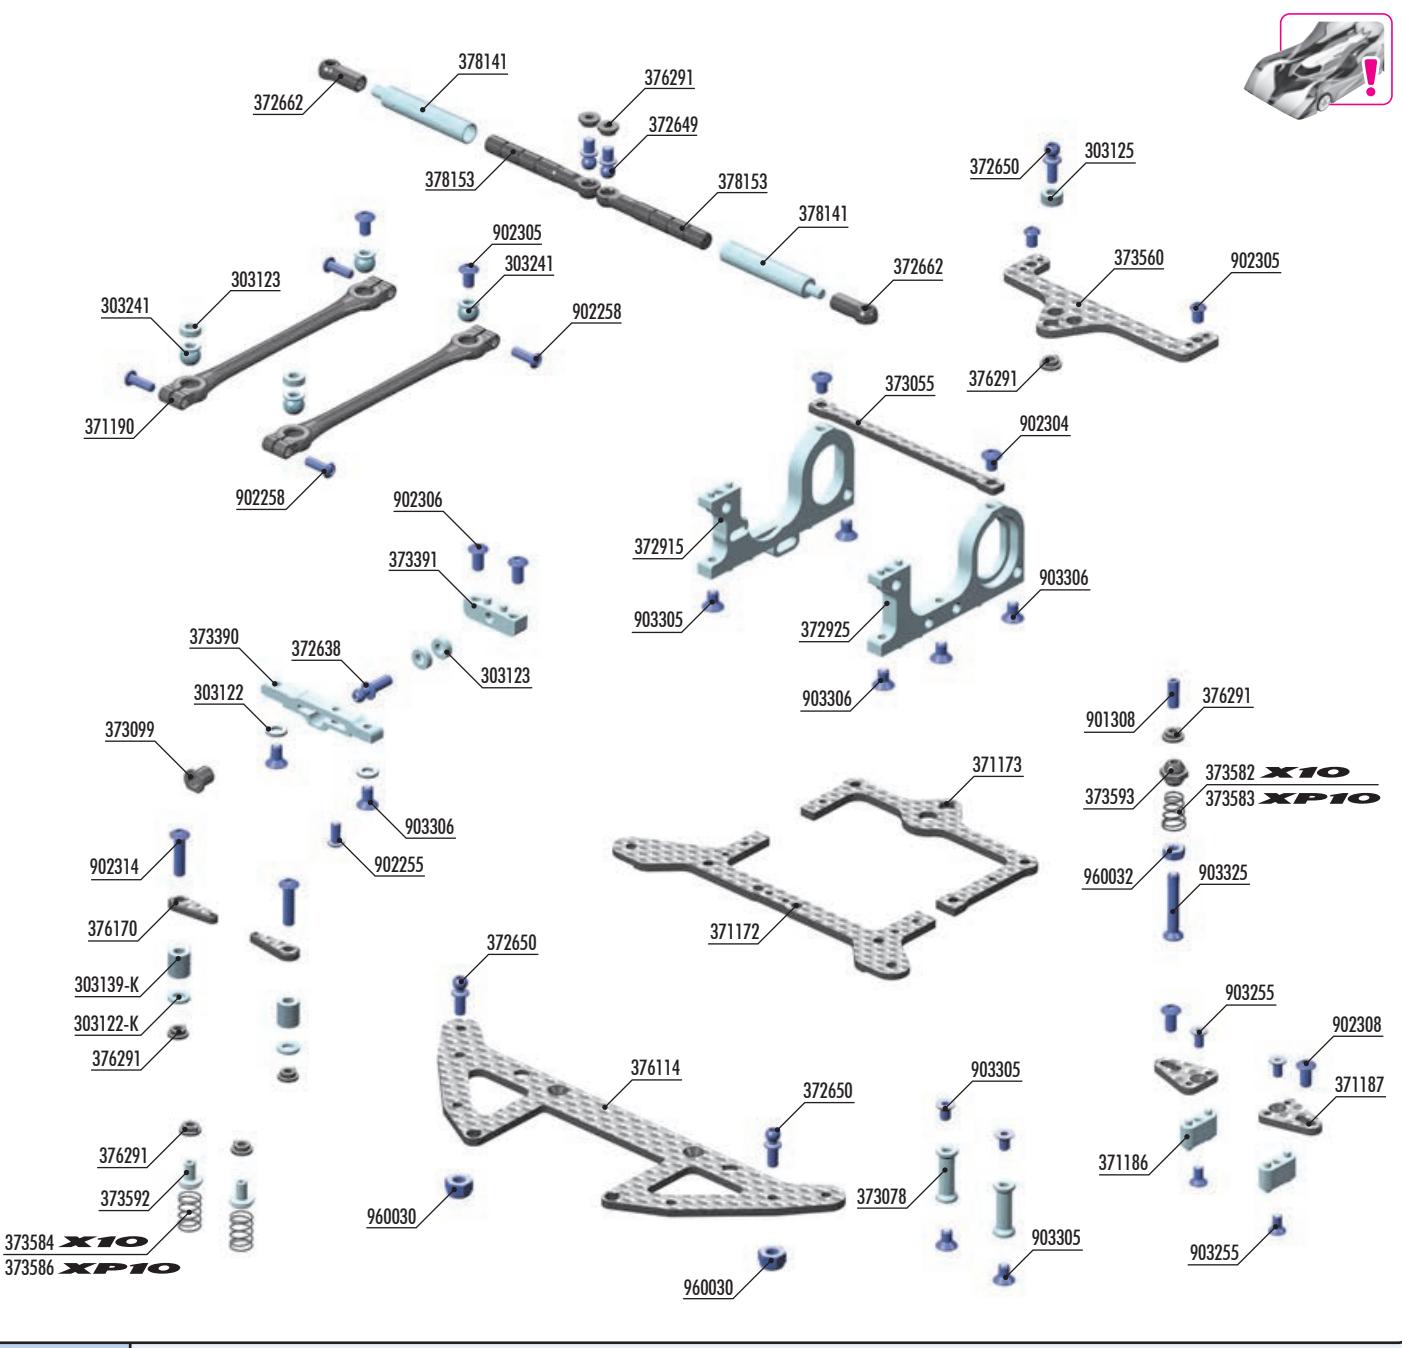

303122	ALU SHIM 3x6x1.0mm (10)	373584	SIDE SPRING C=0.6 - SILVER (2)
303122-K	ALU SHIM 3x6x1.0mm - (10)	373586	SIDE SPRING C=1.2 - BLACK (2)
303123	ALU SHIM 3x6x2.0mm (10)	373592	STEEL SIDE SPRING RETAINER (2)
303125	ALU SHIM 3x6x3.0mm (10)	373593	COMPOSITE TAPERED/STRAIGHT SPRING HOLDER (2)
303139-K	ALU SHIM 3x6x7.0MM - BLACK (10)	376114	CARBON REAR BRACE FOR 1-PIECE CHASSIS
303241	BALL UNIVERSAL 5.8mm HEX (4)	376170	CARBON BATTERY CLAMP 2.2mm (2)
371172	CARBON REAR POD LOWER PLATE FOR 1-PIECE CHASSIS - FRONT	376291	COMPOSITE M3 SNAP LOCK BUSHING (8)
371173	CARBON REAR POD LOWER PLATE FOR 1-PIECE CHASSIS - REAR	378141	ALU SIDE TUBE (2)
371186	ALU HOLDER WITH 2 PINS FOR SIDE LINK CARBON PLATE - BLACK	378153	COMPOSITE SIDE TUBE SHAFT (2)
371187	CARBON PLATE FOR 2 PINS FOR SIDE LINK (2)		
371190	COMPOSITE POD LINK (2)	901308	HEX SCREW SB M3x8 (10)
372638	HARD STEEL BALL END 3.7mm WITH 8mm THREAD - NICKEL COATED (2)	902255	HEX SCREW SH M2.5x5 (10)
372649	BALL END 4.2mm WITH 4mm THREAD (2)	902258	HEX SCREW SH M2.5x8 (10)
372650	BALL END 4.2mm WITH 6mm THREAD (2)	902304	HEX SCREW SH M3x4 - STAINLESS (10)
372662	COMPOSITE BALL JOINT 4.2mm (4)	902305	HEX SCREW SH M3x5 (10)
372915	ALU REAR BULKHEAD FOR 1-PIECE CHASSIS - MOTOR - RIGHT	902306	HEX SCREW SH M3x6 (10)
372925	ALU REAR BULKHEAD FOR 1-PIECE CHASSIS - LEFT	902308	HEX SCREW SH M3x8 (10)
373055	ARBON REAR BULKHEAD BRACE FOR 1-PIECE CHASSIS	902314	HEX SCREW SH M3x14 (10)
373078	ALU REAR BRACE MOUNT 15.5mm - BLACK (2)	903255	HEX SCREW SFH M2.5x5 (10)
373099	COMPOSITE PIVOT BRACE BUSHING FOR 3.7mm BALL END	903305	HEX SCREW SFH M3x5 (10)
373390	ALU CHASSIS PIVOT HOLDER FOR 1-PIECE CHASSIS - SWISS 7075 T6	903306	HEX SCREW SFH M3x6 (10)
373391	ALU POD PLATE PIVOT HOLDER FOR 1-PIECE CHASSIS - SWISS 7075 T6	903325	HEX SCREW SFH M3x25 (10)
373560	CARBON REAR POD UPPER PLATE FOR 1-PIECE CHASSIS	960030	NUT M3 (10)
373582	TAPESTRY SPRING C=1.5-1.6 - SILVER (2)	960032	NUT M3 - BLACK (10)
373583	TAPESTRY SPRING C=1.7-1.8 - GOLD (2)		




Numbers in parentheses () refer to quantities when purchased separately.

BUILD VIDEO






REAR SUSPENSION

2. REAR SUSPENSION

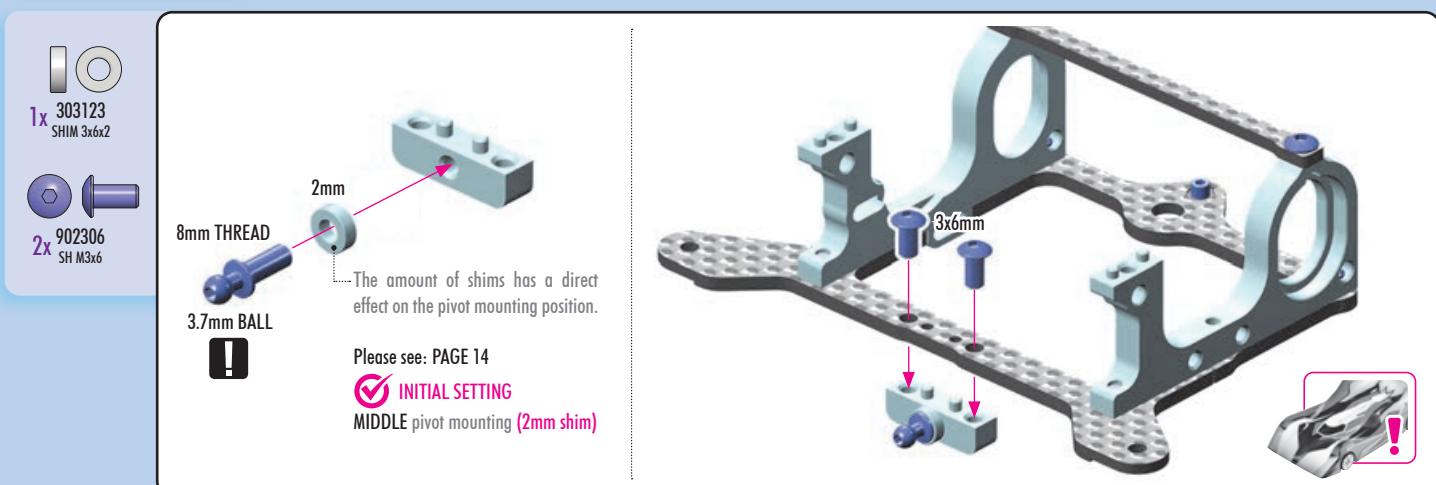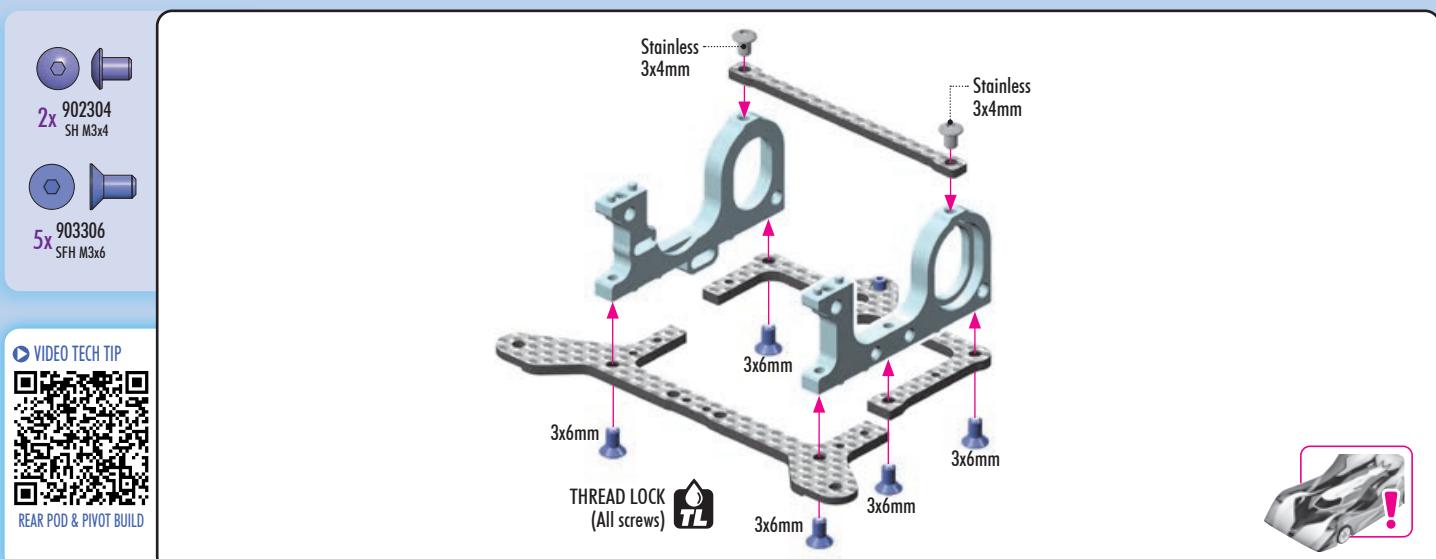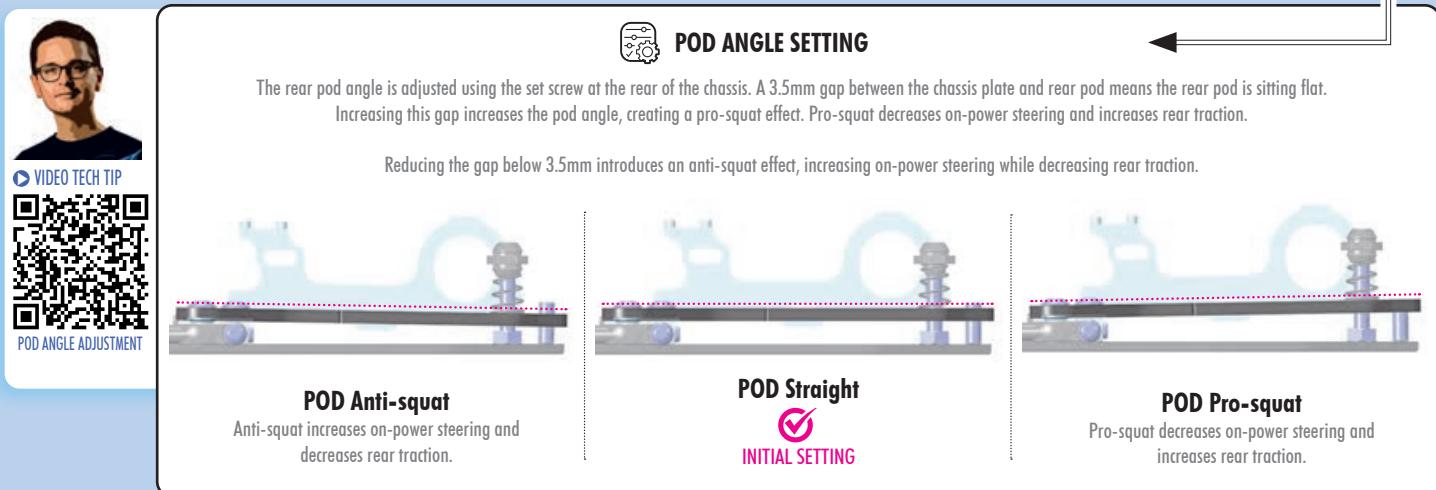


2. REAR SUSPENSION

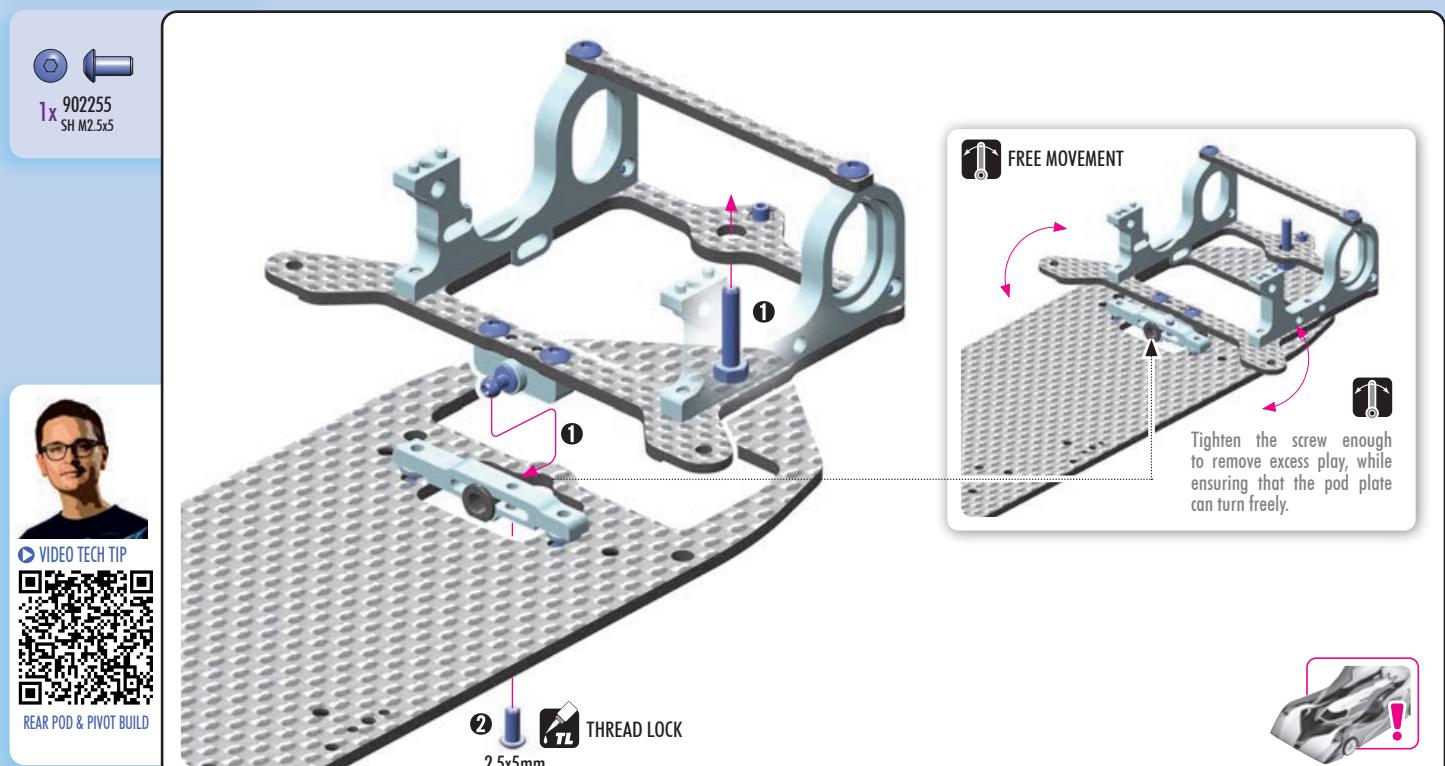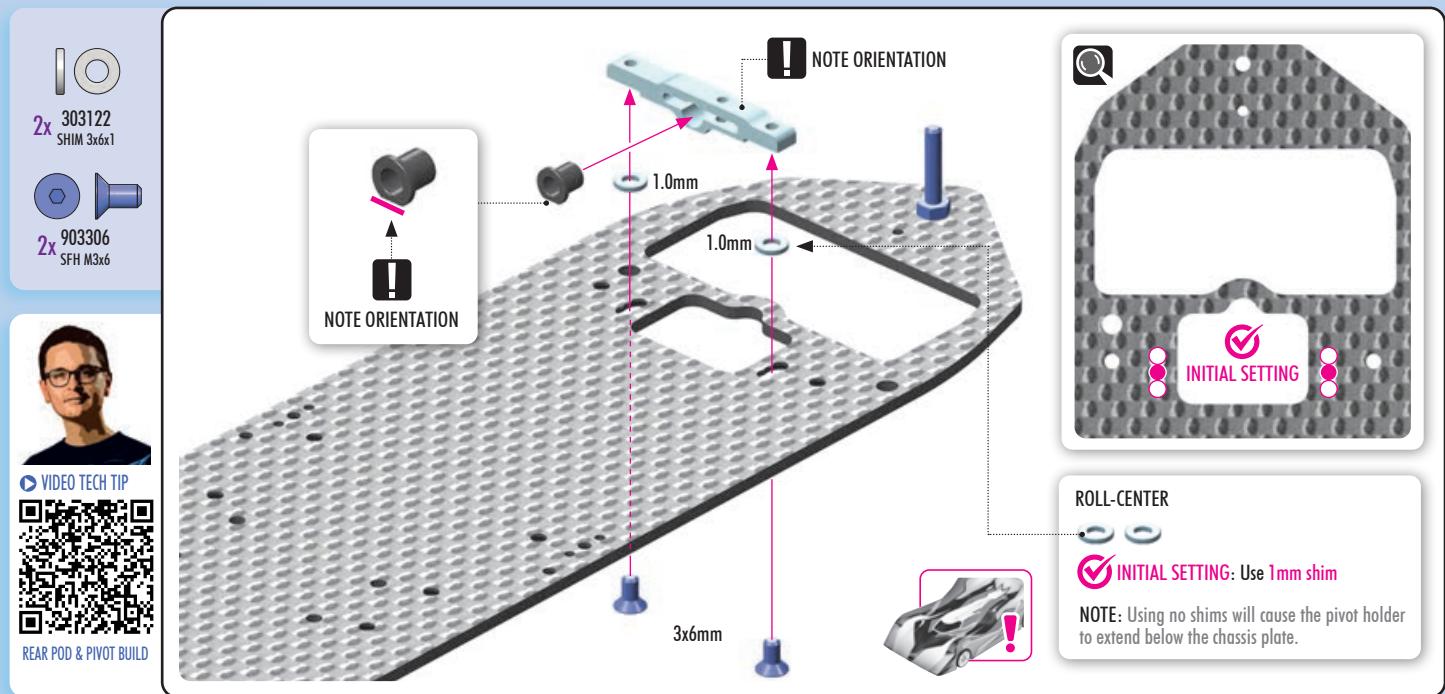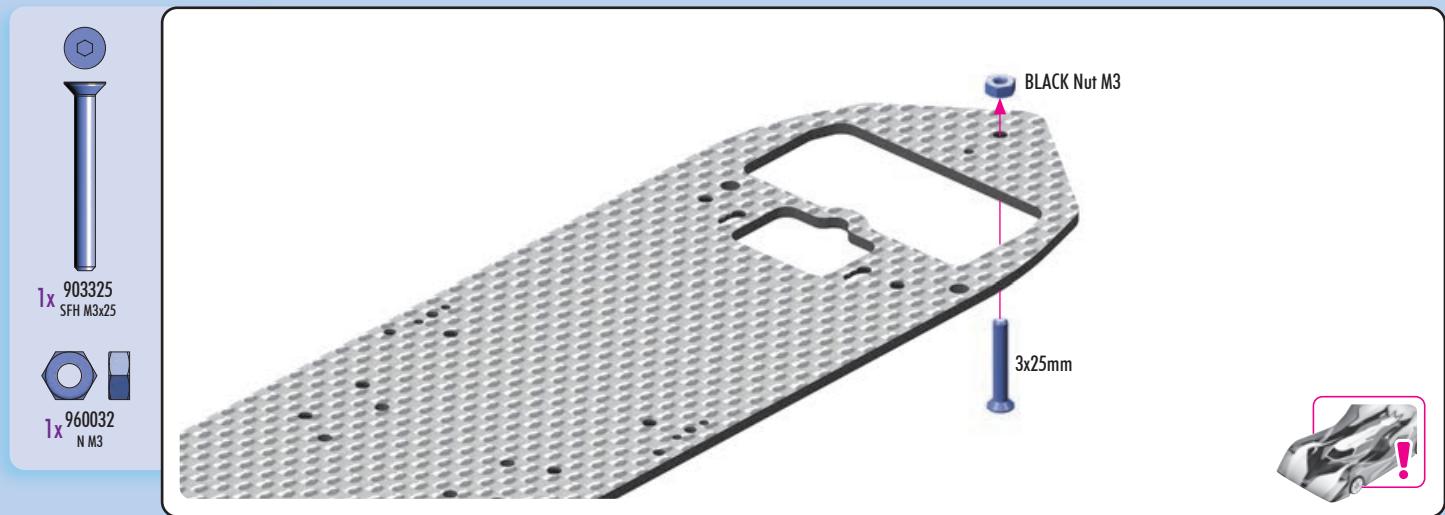

2. REAR SUSPENSION

REARWARD:


Pivot mounted in rear chassis holes with no ball stud shims. Improved rotation from shorter rear pod geometry. Provides most initial steering and rotation; best suited for high traction carpet tracks.

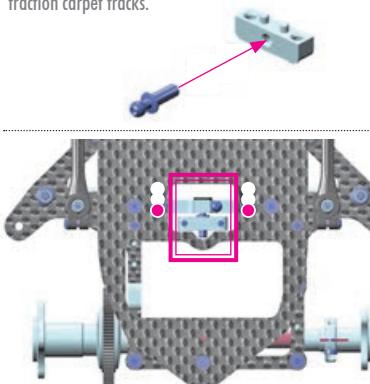

PIVOT MOUNTING ALTERNATIVE


MIDDLE: INITIAL SETTING

Pivot mounted in middle chassis holes with a **2mm** ball stud shim. Balanced front and rear traction; well suited for most conditions.

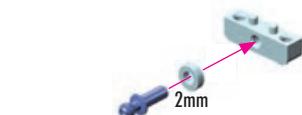

FORWARD:

Pivot mounted in forward chassis holes with **4mm** ball stud shims. Creates the most forgiving handling that allows more aggressive driving without fear of losing rear traction.




TIP #303122 & 303123 shims are NOT INCLUDED in the kit.



The roll center can be adjusted by adding or removing shims from beneath the aluminum pivot mounts.




When changing the shims under the chassis pivot holder, the opposite adjustment of the same thickness must be made above the rear pivot holder to keep the pod in the same position.

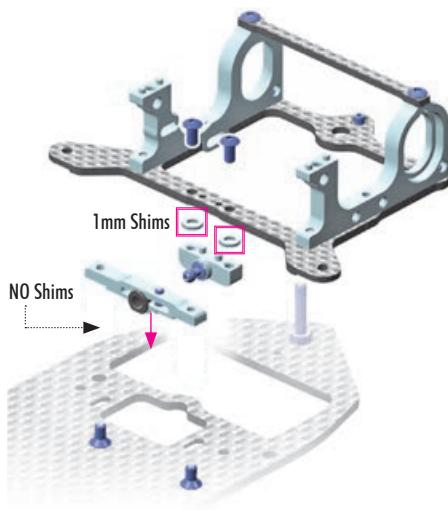

LOWER ROLL CENTER


No shim under alu chassis pivot holder. Creates more traction and increases chassis roll.

Note: The pivot holder will extend below chassis plate in this position.

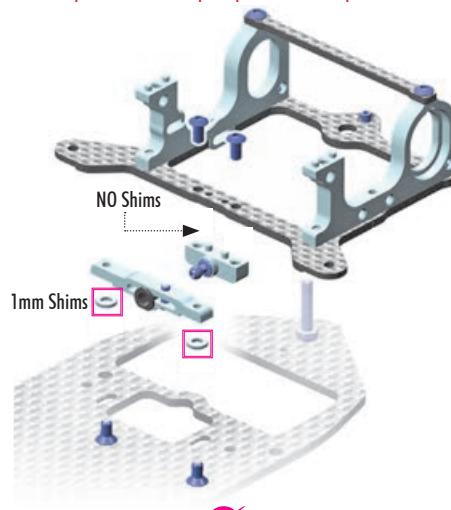

STANDARD ROLL CENTER INITIAL SETTING

The standard roll center is the best starting point for most conditions as it gives the most neutral handling. The chassis pivot holder sits in line with the lower chassis plate.

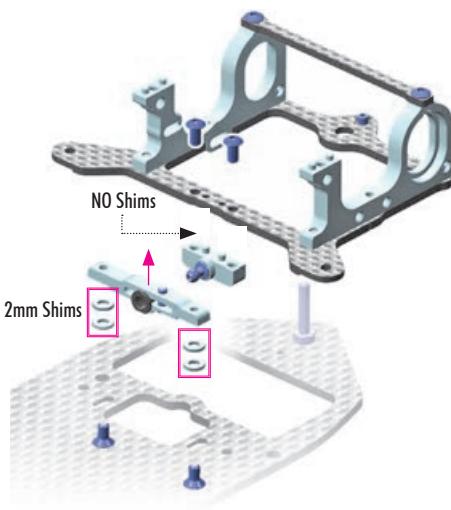

HIGHER ROLL CENTER

Adding shims below the chassis pivot holder increases rotation both on- and off-power.



4x

902258


SH M2.5x8

2.5x8mm

MOVE FREELY

2.5x8mm

DO NOT tighten fully.
Make sure NOT to overtighten.

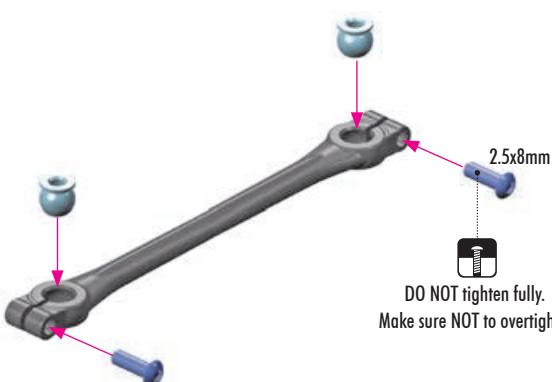


DO NOT tighten fully.
Make sure NOT to overtighten.



2x L=R

4x 903255
SFH M2.5x5

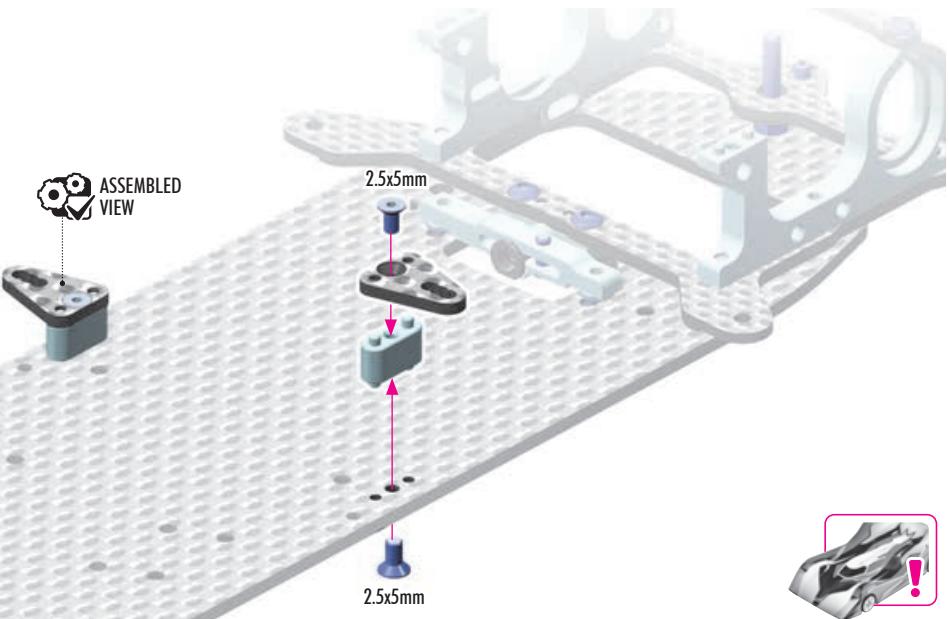

2x 303123
SHIM 3x6x2



2x 902305
SH M3x5




2x 902308
SH M3x8



ASSEMBLED VIEW
Tighten the screws enough to remove excess play, while ensuring that the pod plate can move freely.



Ensure free, smooth movement.

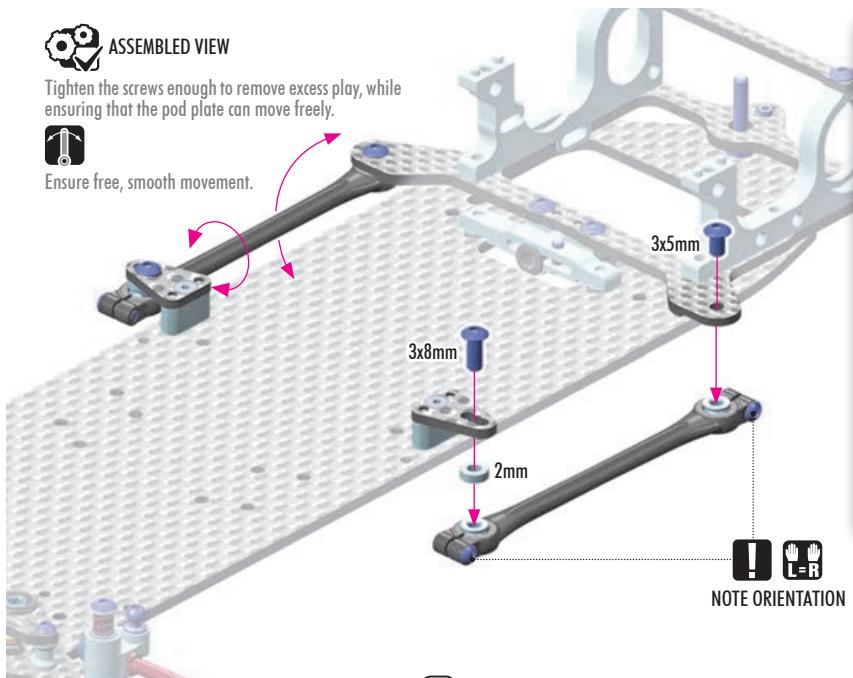

POD LINKAGE POSITION

OUTER POSITION



INITIAL SETTING

LESS ANGLED side links make the car easier to drive.

MIDDLE POSITION

MORE ANGLED side links increased in-corner steering.

DO NOT use this position



POD LINKAGE ANGLE ALTERNATIVE


LESS SHIMS

Raising the side links' **FRONT** pivot point (reducing shims) will further increase in-corner steering, but may be more difficult to drive since the rear inner wheel will lift up more during cornering. 0.5-2.0mm shims may be added for fine tuning.




STRAIGHT 2.0mm SHIMS **INITIAL SETTING**

Straight link alignment makes the car easier to drive.

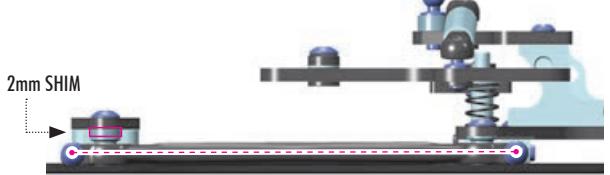

MORE SHIMS

Raising the side links' **REAR** pivot point (adding shims) reduces in-corner steering. This orientation is typically NOT used or recommended.

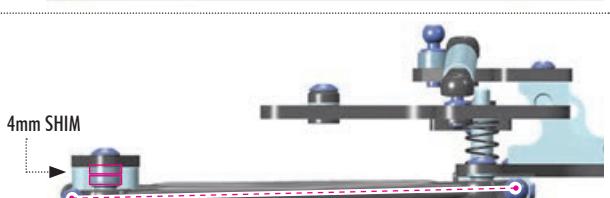



2. REAR SUSPENSION



VIDEO TECH TIP



POD DROOP ADJUSTMENT

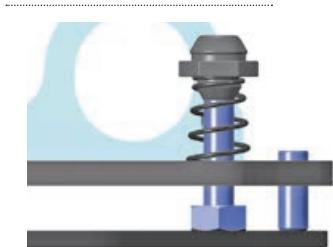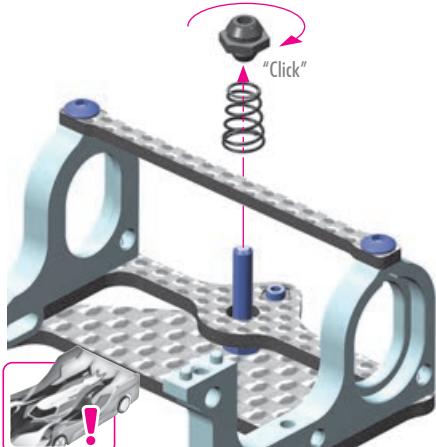

- **TIGHTENING** the rear bump spring increases ride height and reduces droop.
- **LOOSENING** the rear bump spring decreases ride height and increases droop.




REAR RIDE HEIGHT & DROOP SETTING

The rear ride height and rear droop settings are directly related to each other, making it important to use the correct rear axle eccentric holder when adjusting the rear bump spring preload to set the pod droop value.

STIFFER rear bump spring - will be more reactive and will improve on-power steering.
SOFTER rear bump spring - will be less reactive and will be reduce on-power steering.

CONICAL-PROGRESSIVE rear bump spring - provides more aggressive handling than a straight-linear rear bump spring. Using a conical-progressive bump spring is usually the faster and most responsive setup.



When using a **CONICAL-PROGRESSIVE SPRING**, press the spring onto the smaller diameter end of the spring retainer.




OPTION

TAPERED (CONICAL-PROGRESSIVE)

#373582	C=1.5-1.6	SILVER	INCLUDED X10
#373583	C=1.7-1.8	GOLD	INCLUDED XP10



STRAIGHT-LINEAR rear bump spring - provides more neutral handling to make the car easier to drive.



When using a **STRAIGHT-LINEAR SPRING**, press the spring onto the larger diameter end of the spring retainer.




OPTION

SIDE SPRINGS (STRAIGHT-LINEAR)

#373589	C=0.5	BLACK	OPTION
#373584	C=0.6	SILVER	OPTION
#373585	C=0.9	GOLD	OPTION
#373586	C=1.2	BLACK	OPTION
#373587	C=1.5	SILVER	OPTION
#373588	C=1.8	GOLD	OPTION

! Use the same pressing method for all parts in the instruction manual.

Follow PAGE 12 / Step 1

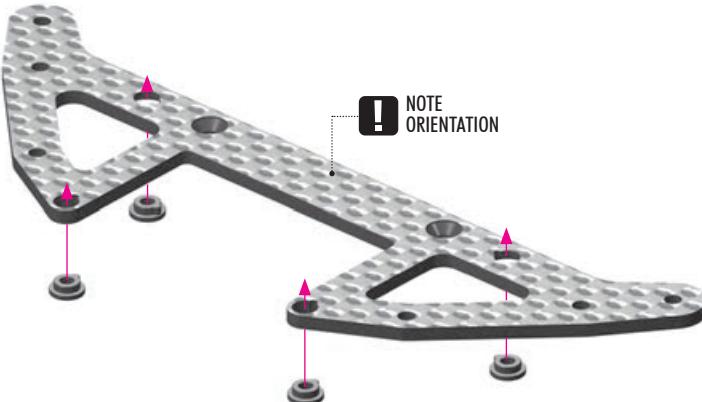

2x 303122-K
SHIM 3x6x1



1x 303139-K
SHIM 3x6x7




2x 902312
SH M3x12




2x 960030
N M3

2x


L=R

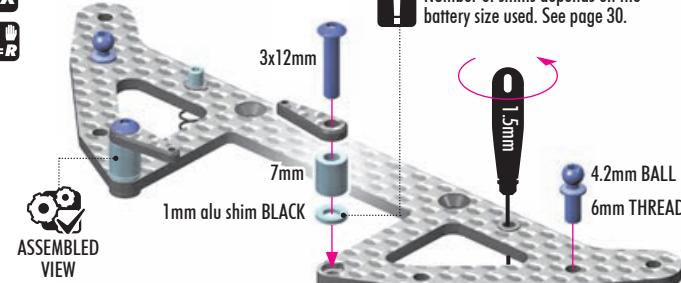

! Number of shims depends on the battery size used. See page 30.

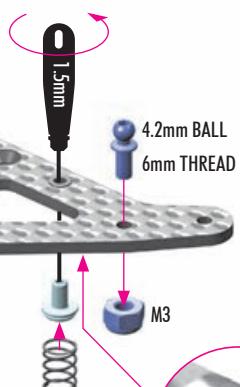

! NOTE ORIENTATION
Leading edge of hole is beveled.

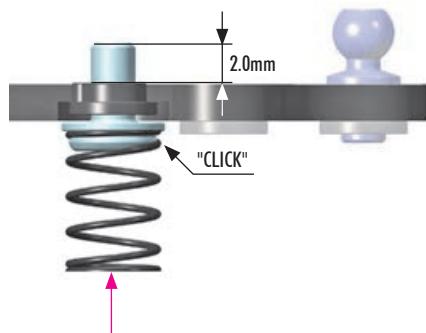

OPTION

SIDE SPRINGS

#373589	C=0.5	BLACK	OPTION
#373584	C=0.6	SILVER	INCLUDED X10
#373585	C=0.9	GOLD	OPTION
#373586	C=1.2	BLACK	INCLUDED XP10
#373587	C=1.5	SILVER	OPTION
#373588	C=1.8	GOLD	OPTION




4x 903305
SFH M3x5



VIDEO TECH TIP





BATTERY MOUNTING SYSTEM

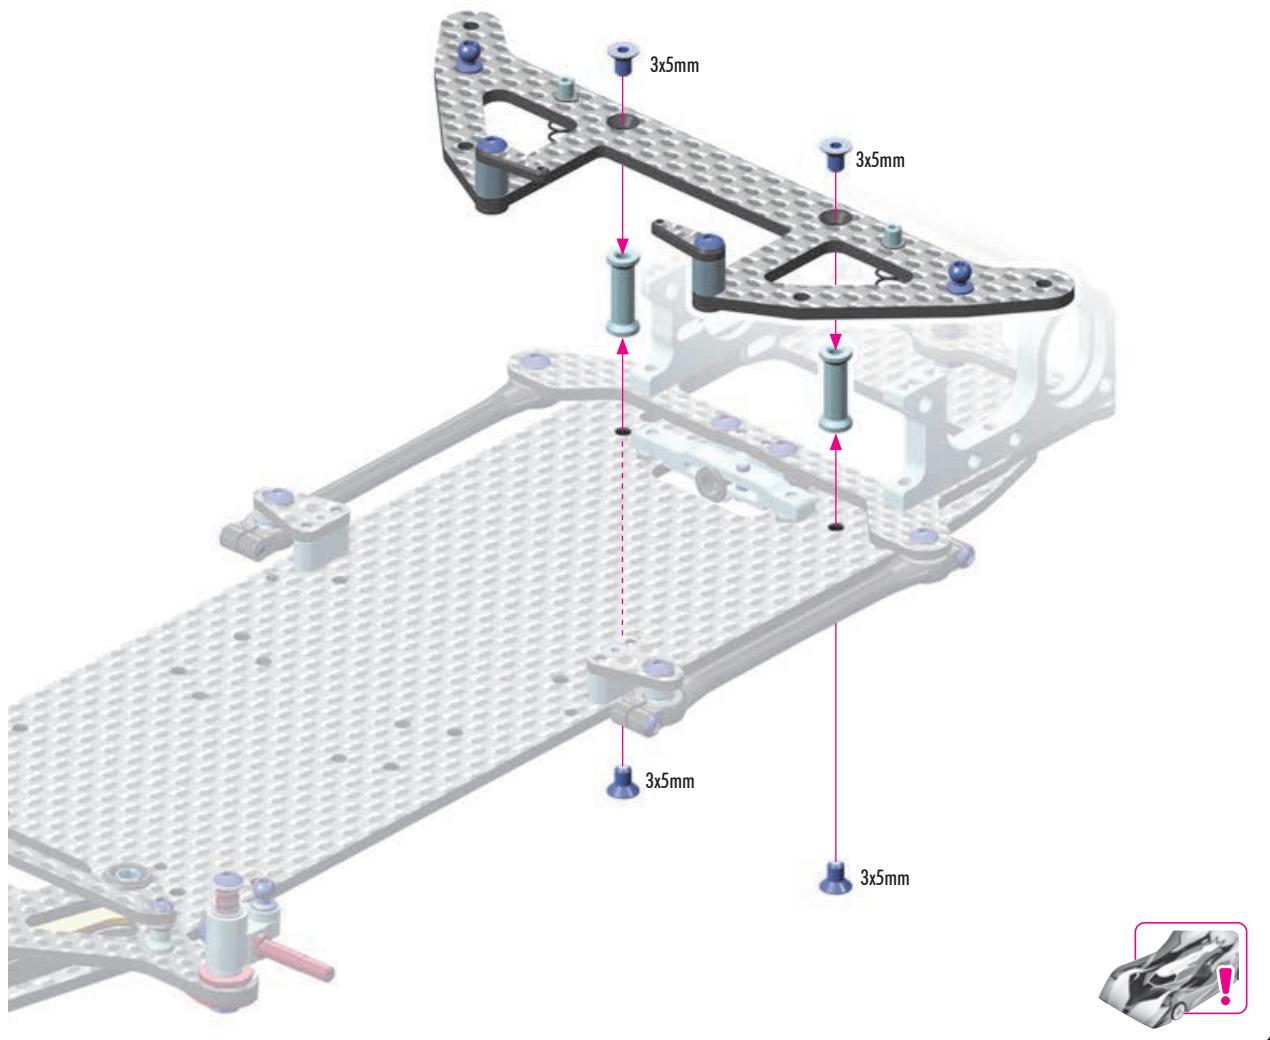

1x 303125
SHIM 3x6x3



2x 902305
SFH M3x5

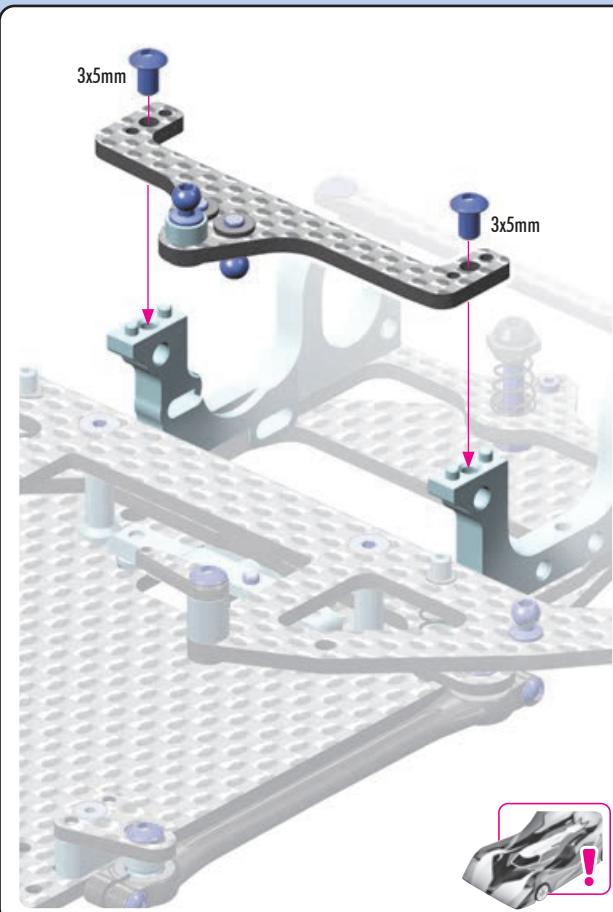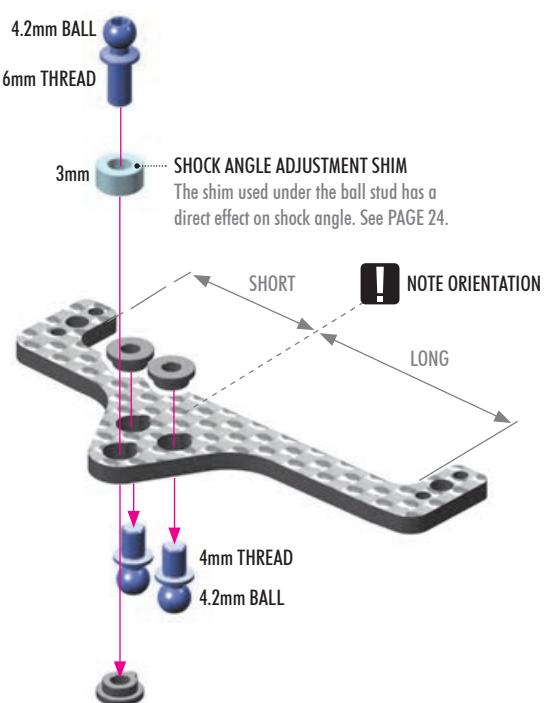

2. REAR SUSPENSION




VIDEO TECH TIP




SIDE TUBES

2x

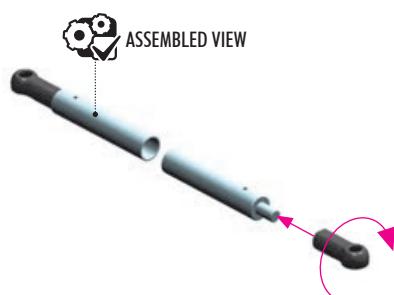

ASSEMBLED VIEW

2x

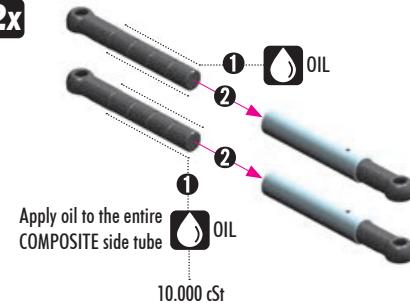

Apply oil to the entire COMPOSITE side tube

10.000 cSt



Apply oil to the entire composite side tube before installing in the aluminum tube. After assembly, check for smooth operation. It is very important to check and re-oil the tubes at least once per race day. Oil thickness can be adjusted depending on the track conditions.



For HIGH traction

use HARDER oils

For LOW traction or ASPHALT


use SOFTER oils



HUDY OILS 50ml

OPTION	HUDY OILS 50ml
#106450	5.000cSt OPTION
#106460	6.000cSt OPTION
#106470	7.000cSt OPTION
#106480	8.000cSt OPTION
#106490	9.000cSt OPTION
#106510	10.000cSt INCLUDED
#106492	11.000cSt OPTION
#106512	12.000cSt OPTION
#106515	15.000cSt OPTION
#106517	17.000cSt OPTION
#106520	20.000cSt OPTION
#106530	30.000cSt OPTION

L=R

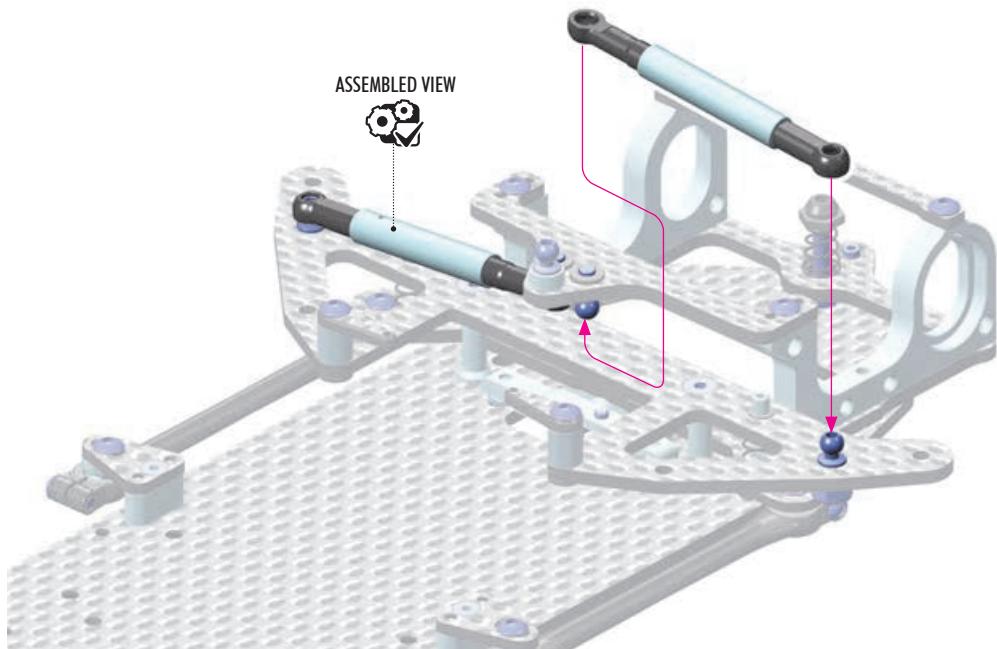

ASSEMBLED VIEW

SIDE TUBE ANGLE

Shims of different thickness installed under ball studs are used for different side tube angle adjustment.


The angle of the side tubes has a minor effect on the car's performance.

HIGHER ANGLE:

Stiffer feeling, less roll.
More progressive damping action.

LOWER ANGLE (FLATTER):

Softer feeling, more roll.
More linear damping action.

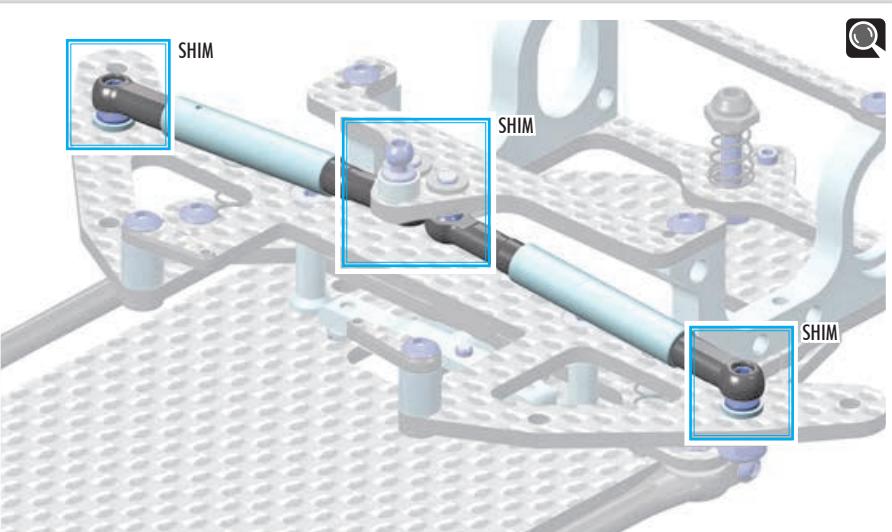

3. BALL DIFFERENTIAL

 OPTION	BALL DIFF - SPUR GEARS		
#375872	72T / 64P	OPTION	
#375875	75T / 64P	OPTION	
#375876	76T / 64P	OPTION	
#375878	78T / 64P	OPTION	
#375880	80T / 64P	OPTION	
#375884	84T / 64P	OPTION	
#375888	88T / 64P	OPTION	
#375892	92T / 64P	INCLUDED	
#375896	96T / 64P	OPTION	



#374902
XRAY GEAR DIFFERENTIAL
1/10 PAN CAR - SET

Included in set
#374902

GEAR DIFF - SPUR GEARS		
#375776	76T / 64P	OPTION
#375780	80T / 64P	OPTION
#375784	84T / 64P	OPTION
#375788	88T / 64P	OPTION
#375792	92T / 64P	OPTION


! Gear Diff fits only X10

I To use the Gear Diff with XP10 optional Rear Wheel Hub for Gear Diff must be used.

 #930238
OPTION CERAMIC AXIAL THRUSTBEARING
F3-8 3x8x3.5mm



 #930230
OPTION CERAMIC BALL 3.175mm (12)

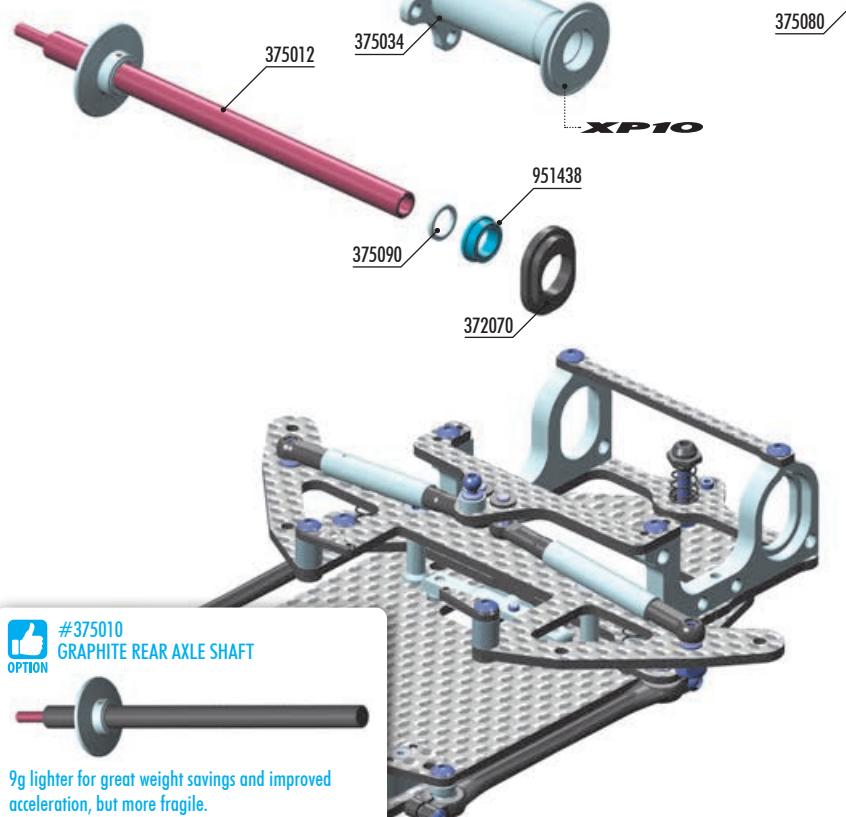

9g lighter for great weight savings and improved acceleration, but more fragile.




372070	COMPOSITE RIDE HEIGHT ADJUSTER SET - V2 (2)
375012	STEEL REAR AXLE SHAFT - HUDY SPRING STEEL™
375034	XP10 ALU REAR WHEEL HUB - RIGHT
375035	X10 ALU REAR WHEEL HUB - RIGHT
375044	XP10 ALU REAR WHEEL HUB - LEFT
375045	X10 ALU REAR WHEEL HUB - LEFT
375050	ALU DIFF HUB
375080	D-LOCK DIFF PLATE (2)
375090	SET OF ALU SHIMS (0.5mm, 1.0mm, 2.0mm)
375093	ALU SHIM 6.37x8.4x6.0mm (2)
375892	COMPOSITE SPUR GEAR - 92T / 64P


908258	HEX SCREW SOCKET HEAD CAP M2.5x8 (10)
930130	CARBIDE BALL 3.175mm (12)
930138	CARBIDE BALL-BEARING AXIAL F3-8 3x8x3.5
941438	HIGH-SPEED BALL-BEARING 1/4" x 3/8" x 1/8" RUBBER-SEALED (2)
951438	BALL-BEARING 1/4" x 3/8" x 1/8" FLANGED (2)
960030	NUT M3 (10)
963030	CONE WASHER ST 3x8x0.5 (10)

Numbers in parentheses () refer to quantities when purchased separately.

X10'26

3. BALL DIFFERENTIAL

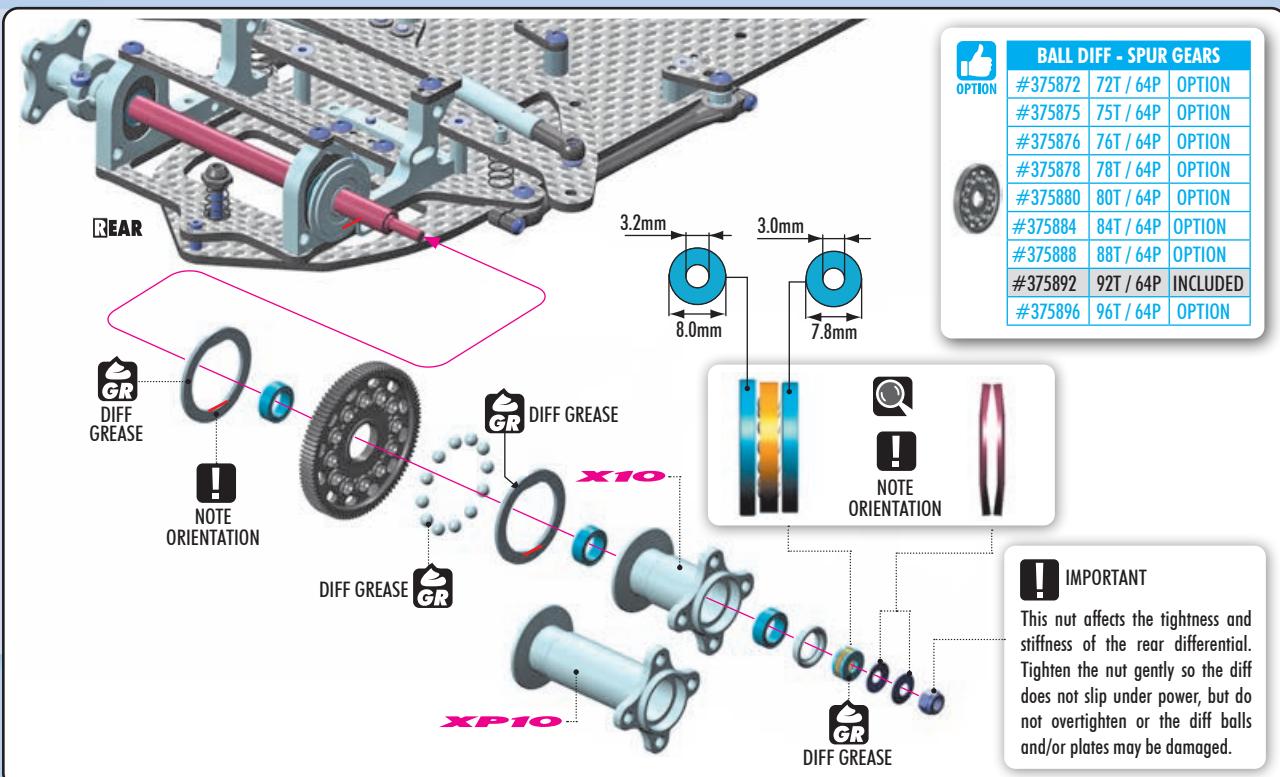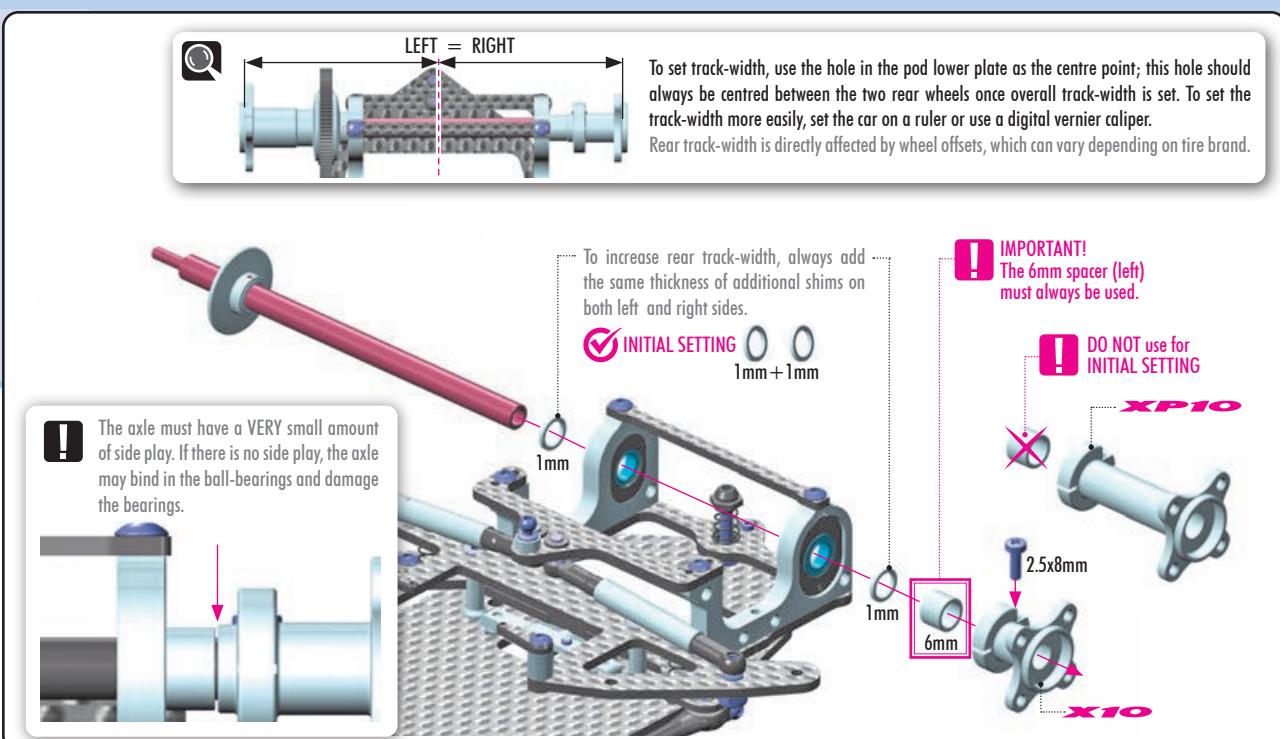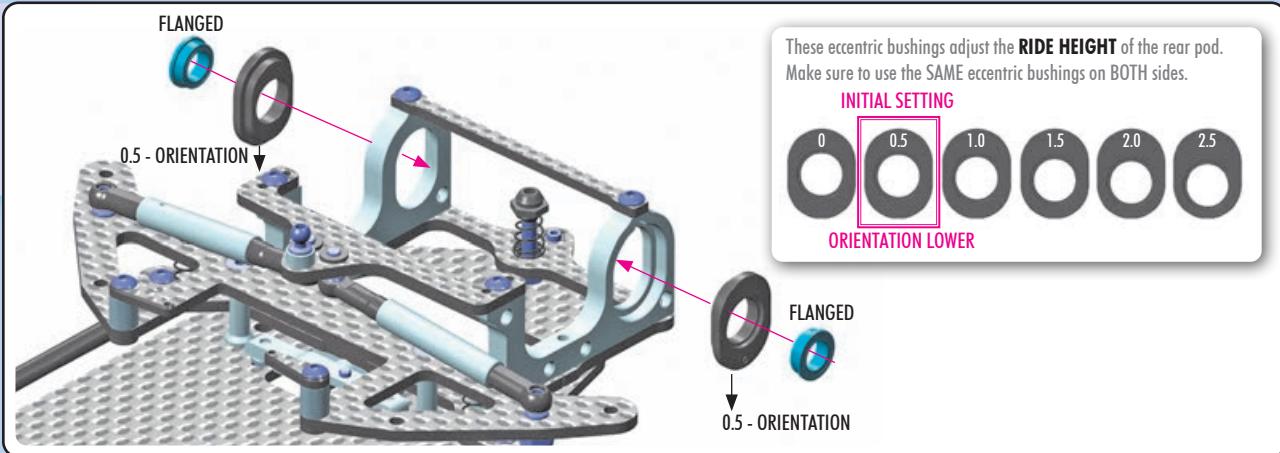

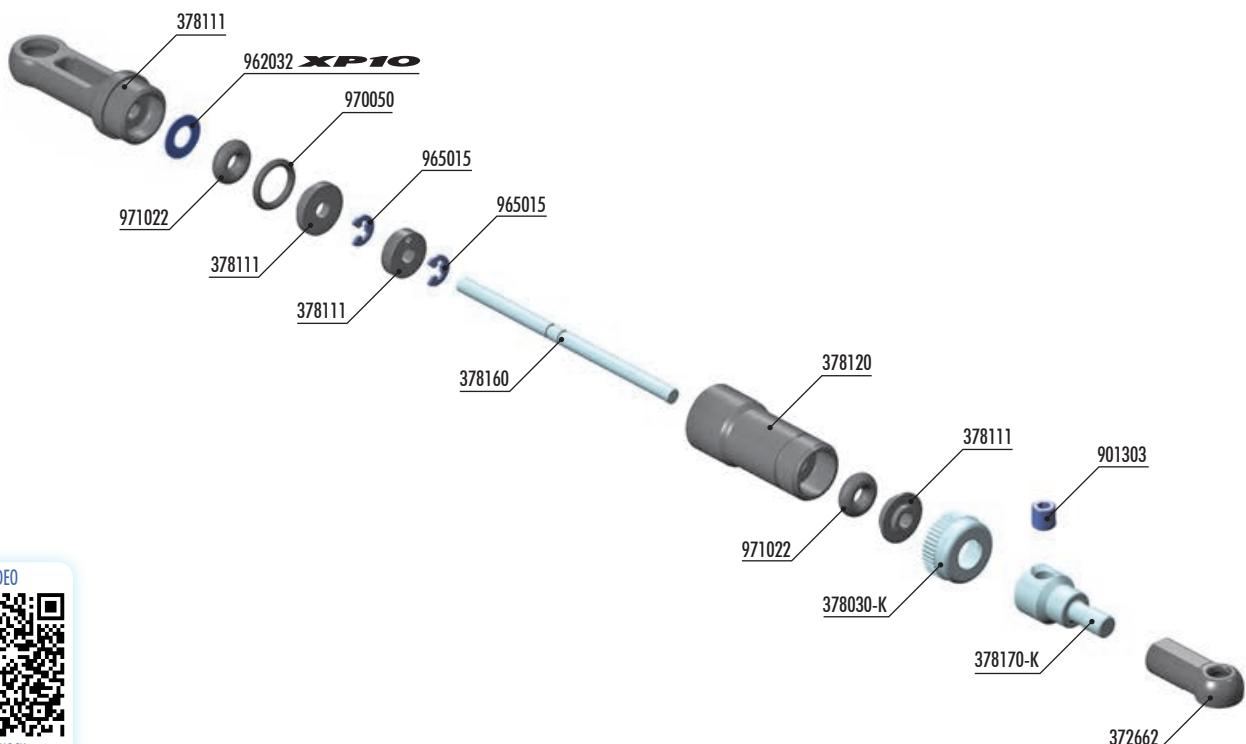

BUILD VIDEO



CENTER SHOCK



HUDY SILICONE OILS - 50ml

#106310	100cSt	OPTION	#106342	425cSt	OPTION	#106365	650cSt	OPTION
#106315	150cSt	OPTION	#106345	450cSt	OPTION	#106367	675cSt	OPTION
#106320	200cSt	OPTION	#106347	475cSt	OPTION	#106370	700cSt	INCLUDED
#106325	250cSt	OPTION	#106350	500cSt	OPTION	#106375	750cSt	OPTION
#106330	300cSt	OPTION	#106355	550cSt	OPTION	#106380	800cSt	OPTION
#106335	350cSt	OPTION	#106357	575cSt	OPTION	#106390	900cSt	OPTION
#106337	375cSt	OPTION	#106360	600cSt	OPTION	#106410	1000cSt	OPTION
#106340	400cSt	OPTION	#106362	625cSt	OPTION	#106420	2000cSt	OPTION

#10402
OPTION
HUDY AIR VAC
VACUUM PUMP

BAG

04

372662 COMPOSITE BALL JOINT 4.2mm (4)
 378030-K ALU SHOCK BODY CAP - LOWER - BLACK
 378102 CENTER DAMPENER SET
 378111 COMPOSITE CENTER DAMPENER PARTS
 378120 ALU SHOCK BODY
 378160 STEEL SHOCK SHAFT
 378170-K ALU SHOCK BALL JOINT SCREW - BLACK

901303 HEX SCREW SB M3x3 (10)
 962032 WASHER S 3x6x0.2 (10)
 965015 E-CLIP 1.5 (10)
 970050 O-RING 5x1 (10)
 971022 SILICONE O-RING 2x2 (10)

Numbers in parentheses () refer to quantities when purchased separately.

965015
C1.5


SPECIFIC ORDER

Carefully remove the shock piston from the frame, and remove all excess plastic flash.

! Make sure to orient the piston so the hole is NOT blocked by the c-clips.





ASSEMBLED VIEW



4. SHOCK ABSORBER



1x 971022
0 2x2

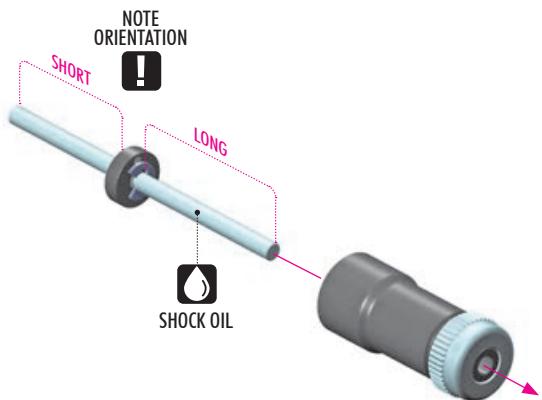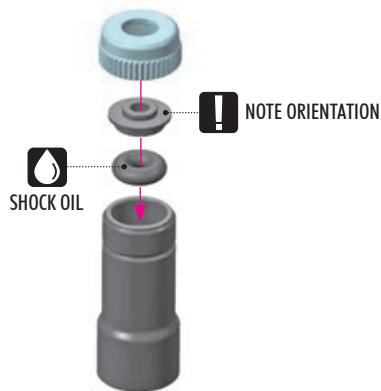

1x 970050
0 5x1




1x 971022
0 2x2



1x 962032
S 3x6x0.2

DEFAULT SHOCK SETTING FOR SHOCK ABSORBER

Follow the steps below to set the shock.

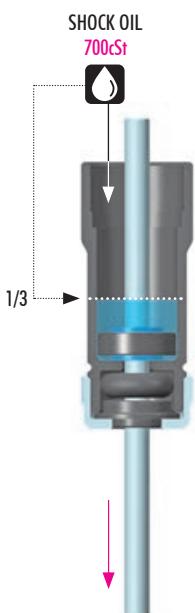

Extend the shock shaft completely. Fill the shock body with the shock oil but only 1/3.



- 1 Slowly move the shock shaft up so the shock oil will flow under the shock piston.
- 2 Extend the shock shaft.



Extend the shock shaft completely to release the air trapped beneath the shock piston. Fill the shock shaft body with the shock oil but NOT fully approx. 3mm from the top of the shock body.



- 1 Install the 5x1 o-ring onto shock shim.
- 2 Place the shock shim with the o-ring into the shock body.
- 3 Install the 2x2 o-ring into the shock cap.
- 4 Install the shock cap.



Screw fully the shock cap in the filled shock body. Excess oil will spill from the shock. Tighten completely.




1x 901303
SB M3x3

► BUILD VIDEO




CENTER SHOCK

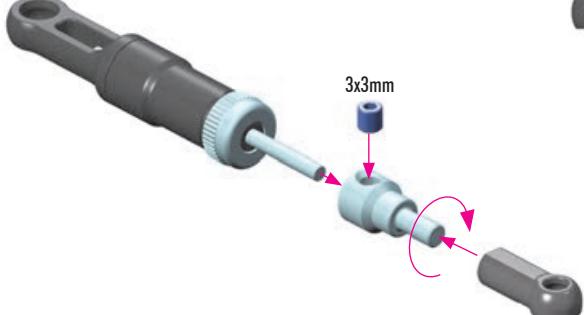

For initial setting, thread fully.

Press the collar FULLY onto the end of the shock shaft and tighten the M3x3 setscrew.

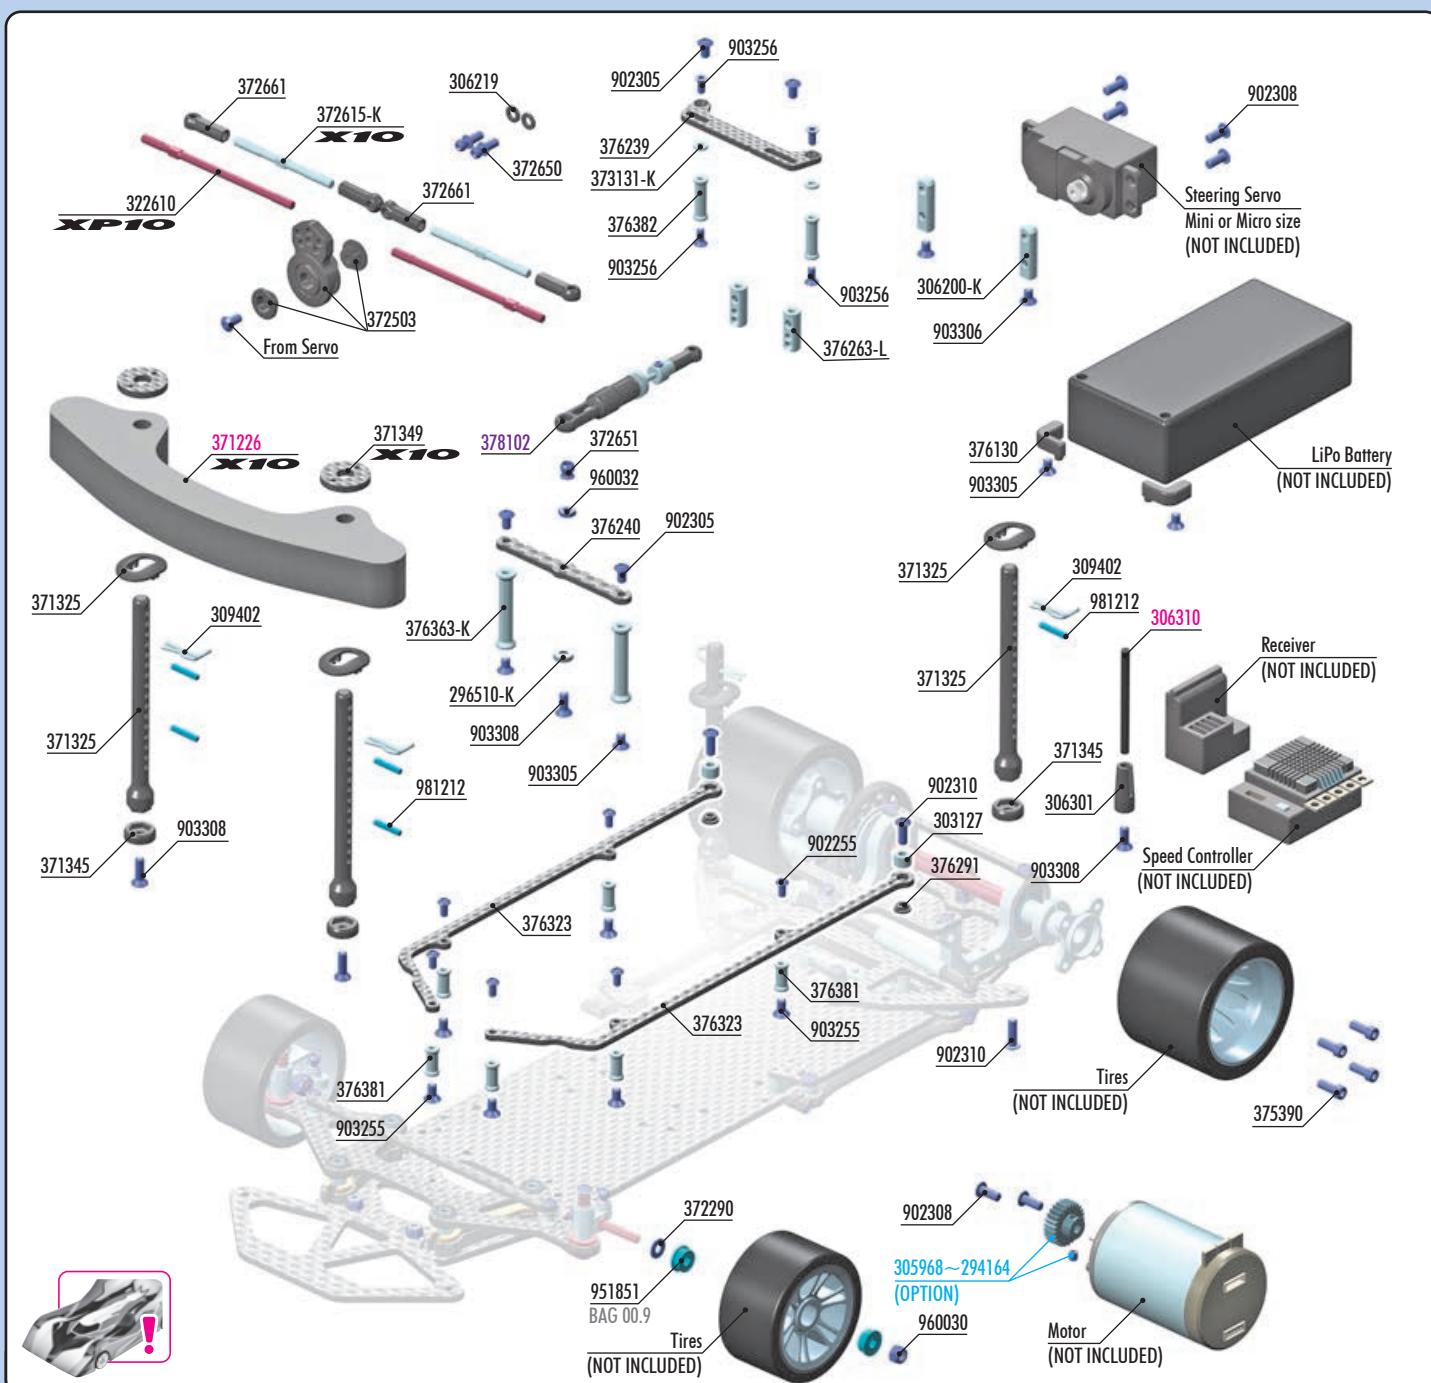

BAG

05

305968~294164 PINION GEAR HARDCOATED 18~64T/64P (OPTION)

296510-K ALU COUNTERSUNK SHIM - BLACK (10)

303127 ALU SHIM 3x6x4.0mm (10)

306200-K ALU SERVO MOUNT - BLACK (2)

306219 COMPOSITE SET OF SERVO SHIMS (4)

306301 ANTENNA MOUNT - THIN

309402 BODY CLIP FOR 6mm BODY POST (4)

322610 ADJ. TURNBUCKLE 55mm M3 L/R - Hudy Spring Steel™ (2)

371325 COMPOSITE BODY POST (2)

371345 COMPOSITE SHIM FOR BODY POST (2)

371349 CARBON SHIM FOR 6mm BODY POST 2.5mm (2)

372290 ALU SHIM 3.2x4.8x0.5 (4)

372503 COMPOSITE SERVO SAVER - STIFF - SET

372615-K ALU ADJ. TURNBUCKLE M3x51mm - SWISS 7075 T6 - BLACK (2)

372650 BALL END 4.2mm WITH 6mm THREAD (2)

372651 HARD STEEL PIVOT BALL 4.9mm - NICKEL COATED (2)

372661 COMPOSITE STEERING BALL-JOINT 4.2mm OPEN (4)

373131-K ALU SHIM 2.5x5x1.0mm - BLACK (10)

376130 COMPOSITE LiPo BATTERY BACKSTOP (2)

376239 CARBON SERVO HOLDER FOR 1-PIECE CHASSIS

376240 CARBON CENTER DAMPENER HOLDER FOR 1-PIECE CHASSIS

376291 COMPOSITE M3 SNAP LOCK BUSHING (8)

372503 ALU SERVO MOUNT - BLACK (2)

376323 CARBON SIDE BRACE FOR 1-PIECE CHASSIS (2)

376363-K

ALU MOUNT 28.5mm - BLACK (2)

376381 ALU MOUNT 10.0mm WITH M2.5 THREAD - BLACK (2)

376382 ALU MOUNT 15.5mm WITH M2.5 THREAD - BLACK (2)

375390 ALU HEX SCREW M3x8 FOR REAR WHEELS (6)

HEX SCREW SH M2.5x5 (10)

HEX SCREW SH M3x5 (10)

HEX SCREW SH M3x8 (10)

HEX SCREW SH M3x10 (10)

HEX SCREW SFH M2.5x5 (10)

HEX SCREW SFH M2.5x6 (10)

HEX SCREW SFH M3x5 (10)

HEX SCREW SFH M3x6 (10)

HEX SCREW SFH M3x8 (10)

951851 BALL-BEARING 1/8" x 5/16" x 9/64" FLANGED - STEEL SEALED - OIL (2)

960030 NUT M3 (10)

960032 NUT M3 - BLACK (10)

981212 PIN 2x12 (10)

378102 X12 CENTER DAMPENER SET

306310 ANTENNA (2)

371226 X10 FOAM BUMPER FOR 1-PIECE CHASSIS

BUILD VIDEO




FINAL ASSEMBLY

5. FINAL ASSEMBLY



6x 903255
SFH M2.5x5

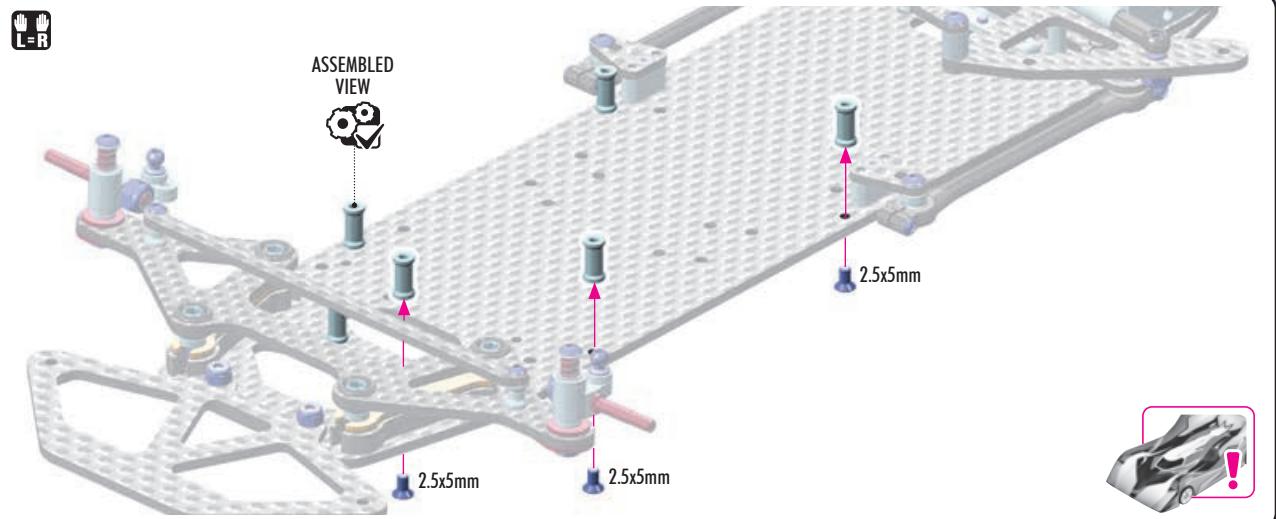


2x 303127
SHIM 3x6x4



4x 902255
SH M2.5x5



2x 902310
SH M3x10

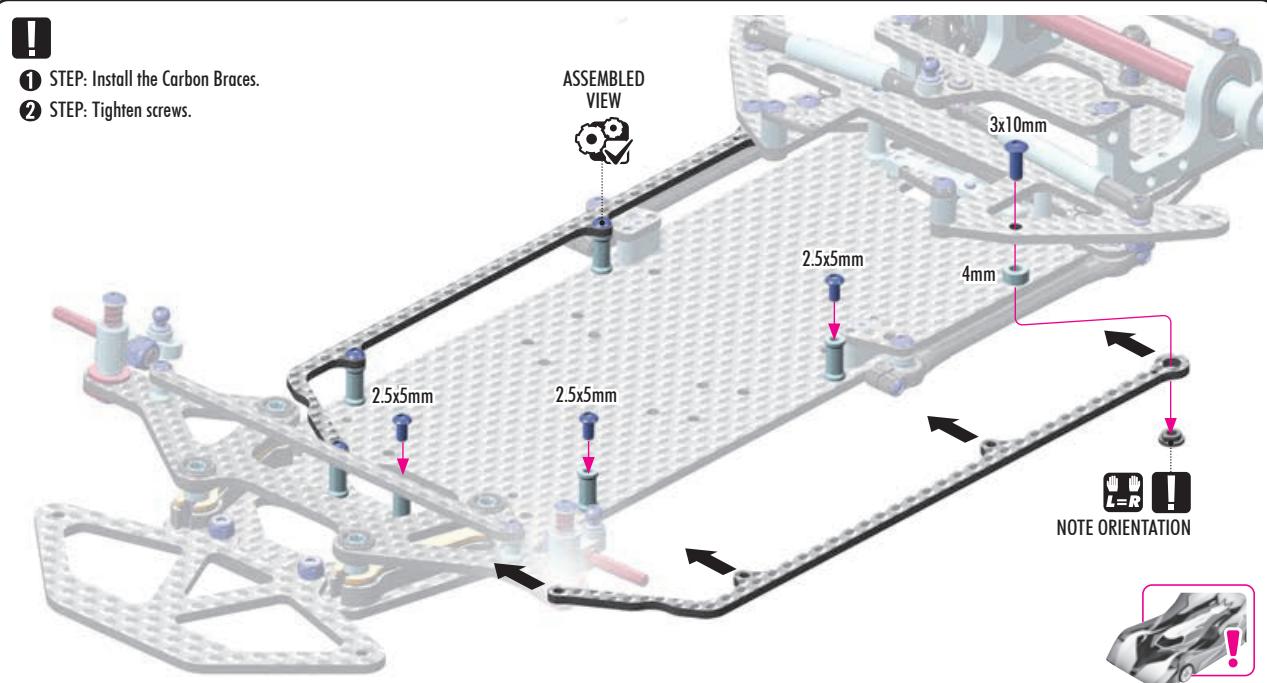

CHASSIS FLEX ADJUSTMENT




VIDEO TECH TIP




SOFT

Generates more mechanical traction. Recommended for low- to medium-traction carpet as well as asphalt. (NO BRACES)

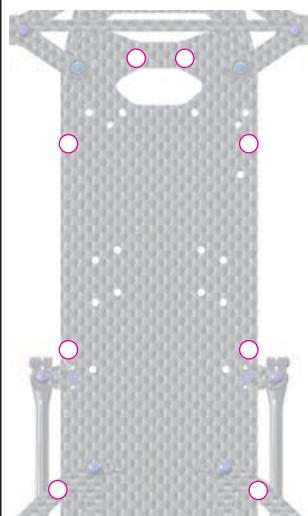


MEDIUM

Braces installed, attached at middle & rear only. This setting is a good compromise between mechanical traction and steering response. Ideal for most track conditions..

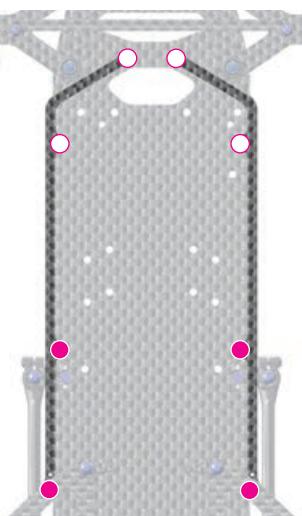


MEDIUM STIFF


Braces installed, attached at middle-front, middle, and rear. A good compromise between mechanical traction, and steering response. A good option for higher traction conditions.

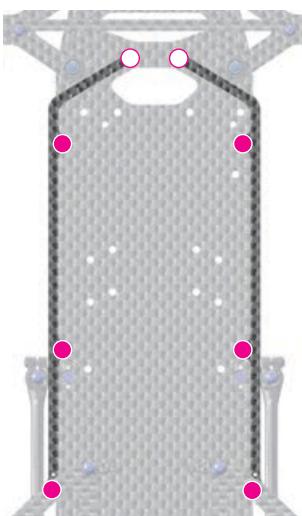

STIFF INITIAL SETTING

Braces installed, attached at front, middle-front, middle and rear. This is the stiffest, most stable setting. Recommended for high-traction carpet tracks (such as US black carpet). The car will have less roll but will also have less overall traction.

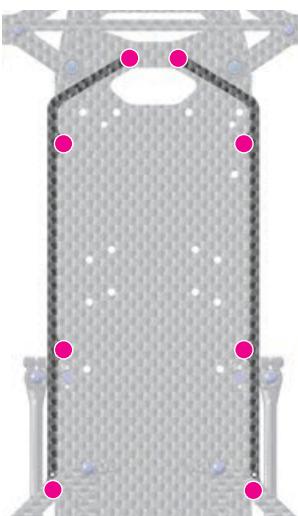



2x 902306 SH M3x6



2x 903305 SFH M3x5



1x 903308 SFH M3x8



1x 960032 N M3

NOTE ORIENTATION !

3x6mm

BLACK Nut M3

3x6mm

3x8mm

3x5mm

3x5mm

This COUNTERSUNK SHIM acts as a battery backstop. If there is a large gap between the battery and shim, add additional shims above the countersink shim to reduce play and prevent excess battery movement.



#378003 SHOCK ABSORBER SET



As an option, you may also use the #378003 shock absorber with spring. In this case, the rear bump spring needs to be removed.



SHOCK SPRINGS

OPTION	#378093	C=1.8	GOLD	OPTION
	#378094	C=2.1	BLACK	OPTION
	#378097	C=2.8	BLACK 3 DOTS	OPTION
	#378098	C=3.1	BLACK 4 DOTS	OPTION



SHOCK ANGLE & POSITION

MORE SHOCK ANGLE

More shim in rear.

Makes the damping more progressive and increases on-power steering. Recommended for high-traction track conditions when you need to free up the rear.




LESS SHOCK ANGLE


More shim in front, less shim in rear.

Makes the damping more linear. Increases stability, decreases on-power steering. Recommended for low- to medium traction track conditions..


INITIAL SETTING

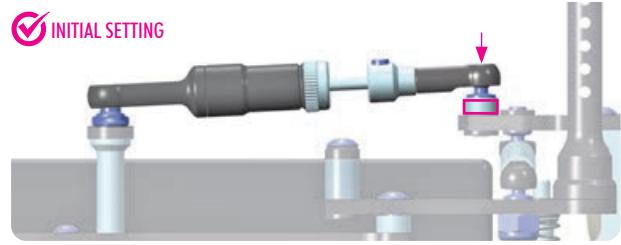

SERVO SAVER

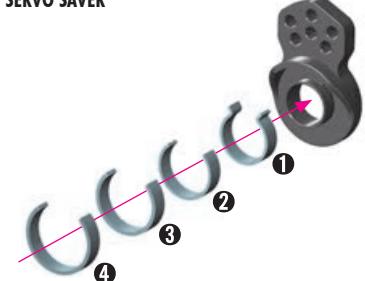

ASSEMBLED VIEW

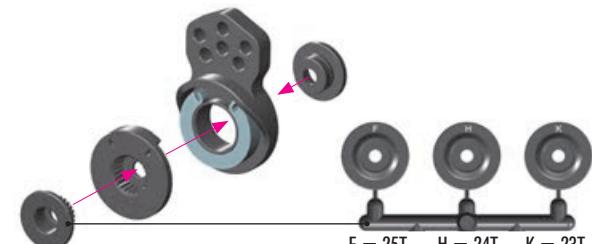

! Use the adapter that matches the steering servo.

ACKERMANN SETTING

Use shims to set the required Ackermann setting.

! DO NOT use for INITIAL SETTING

6mm THREAD


4.2mm Ball

Servo Screw (NOT INCLUDED)

SERVO ALTERNATIVE (NOT INCLUDED)

- STANDARD size servo
- MID SIZE servo
- MICRO size servo

Note the orientation of servo saver when servo is in neutral.

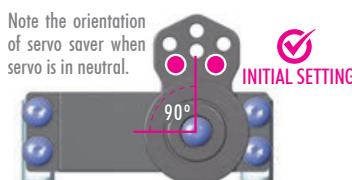

#293351 Hudy Alu Adj. Servo Saver



The unique solution of eccentric inserts allows for 3 different Ackermann positions to be used, to fine tune the handling of your car by quick changes with little effort.



#293350 Hudy Alu Fixed Servo Saver




This aluminium servo saver eliminates the flex of the standard composite servo savers that is used, which improves rigidity and thus, the steering response of your car.


5. FINAL ASSEMBLY




ALTERNATIVE 1 - STANDARD size servo FIXED SERVO MOUNT

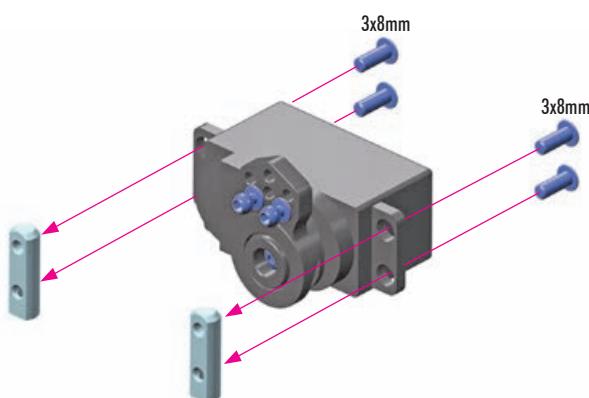

ALTERNATIVE 2 - MID SIZE or MICRO servo FLOATING SERVO MOUNT

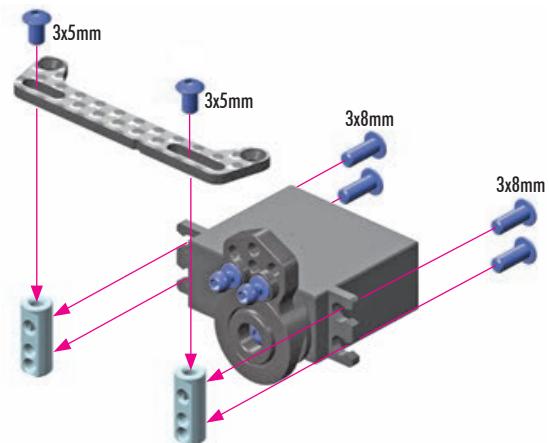

ALTERNATIVE 1 - STANDARD size servo FIXED SERVO MOUNT

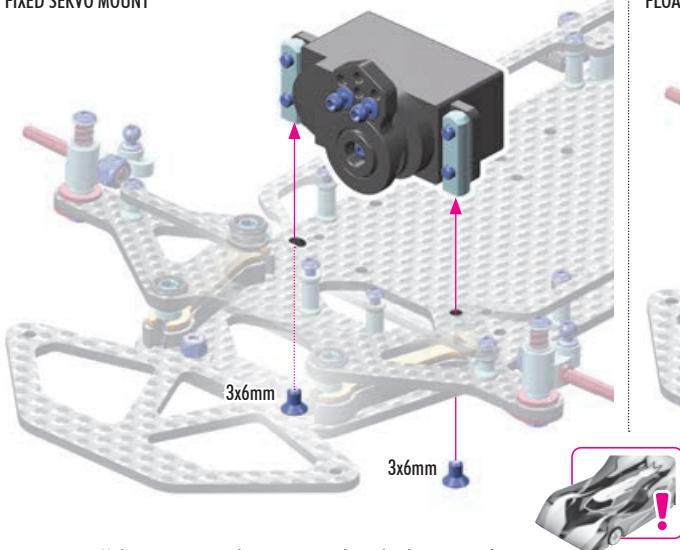

Make sure to center the servo saver along the chassis centerline.


TIP

To better see the chassis centerline, there is a small mark on the chassis.



BOTTOM VIEW


ALTERNATIVE 2 - MID SIZE or MICRO servo FLOATING SERVO MOUNT

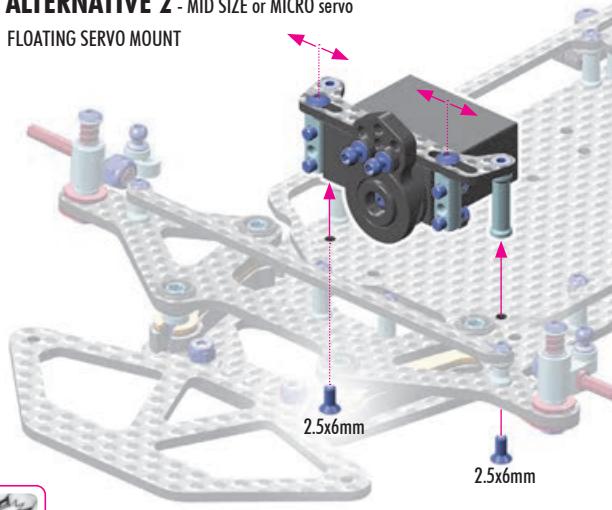

Make sure to center the servo saver along the chassis centerline.

TIP


To better see the chassis centerline, there is a small mark on the chassis and on the carbon servo holder.

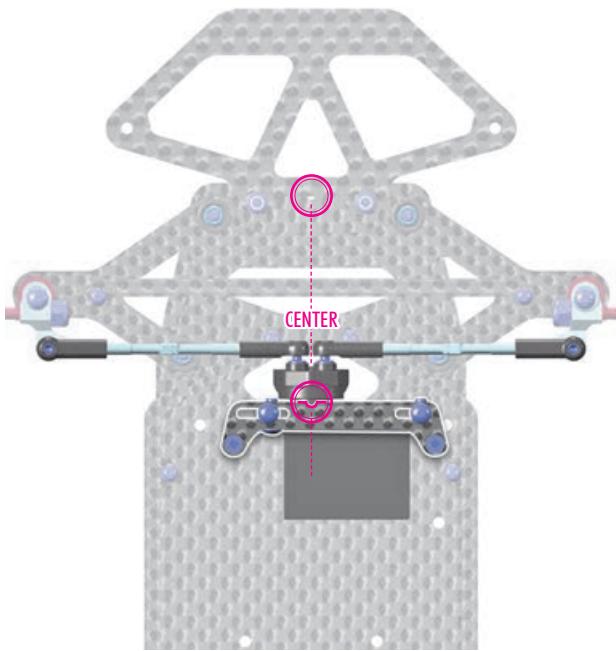

TOP VIEW

5. FINAL ASSEMBLY


STEERING LINKS **X10**

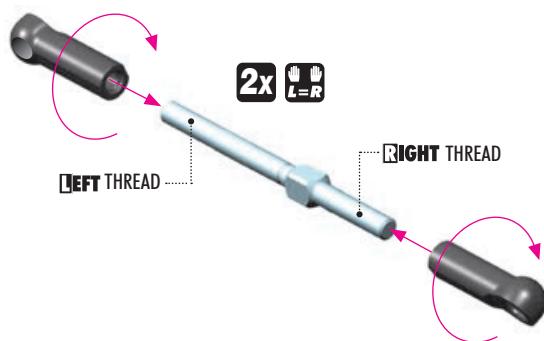

STEERING BLOCK LEFT STEERING BLOCK RIGHT



STEERING LINKS **XP10**

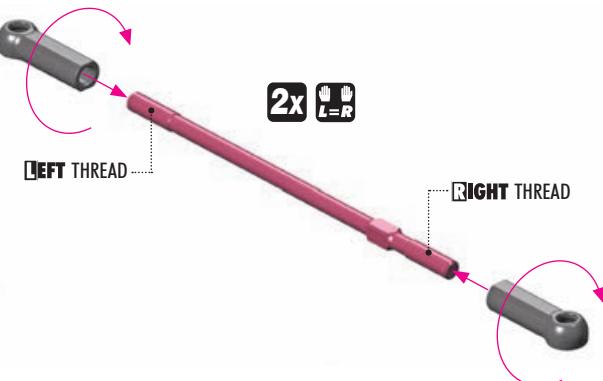

STEERING LINKS FOR INNER HOLES ON STEERING BLOCKS

INITIAL SETTING


STEERING BLOCK LEFT STEERING BLOCK RIGHT



5. FINAL ASSEMBLY

2x  

NOTE ORIENTATION
The square is oriented towards steering block. 

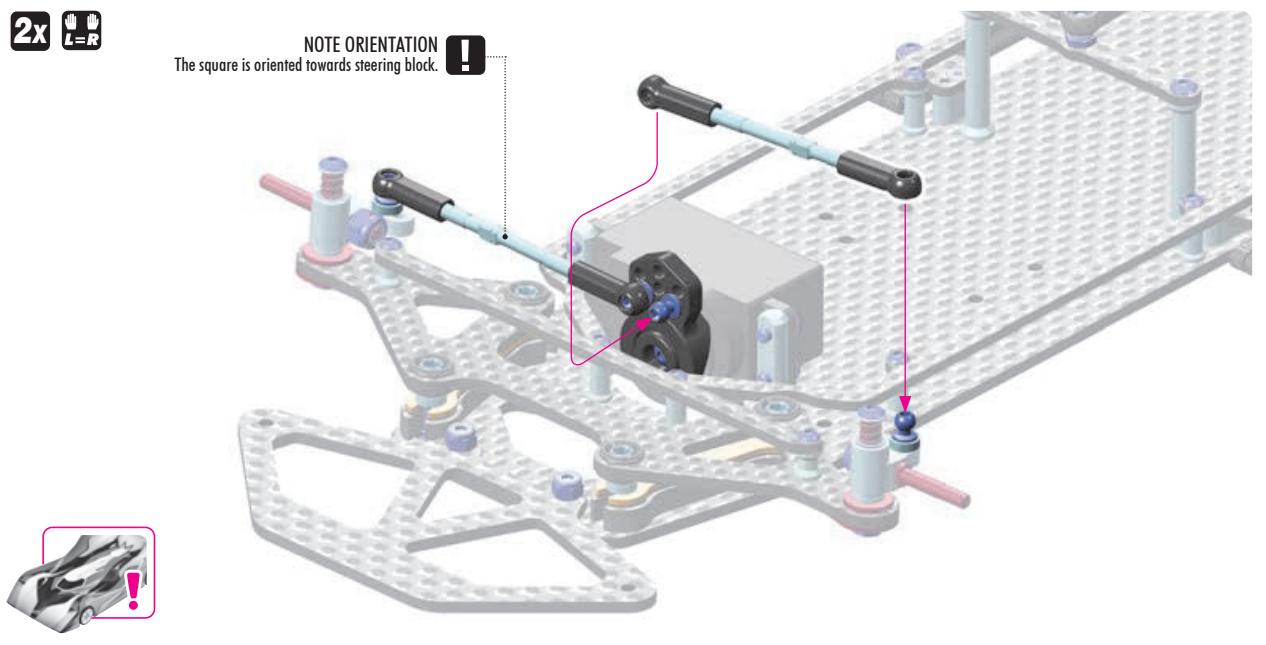

2x 902310
SH M3x10



2x 981212
P 2x12

2x  

REAR BODY POST

X10 & XP10



2x  

FRONT BODY POST

XP10



2x12mm

3x10mm




2x 903308
SFH M3x8

5. FINAL ASSEMBLY





2x FRONT BODY POST
X10

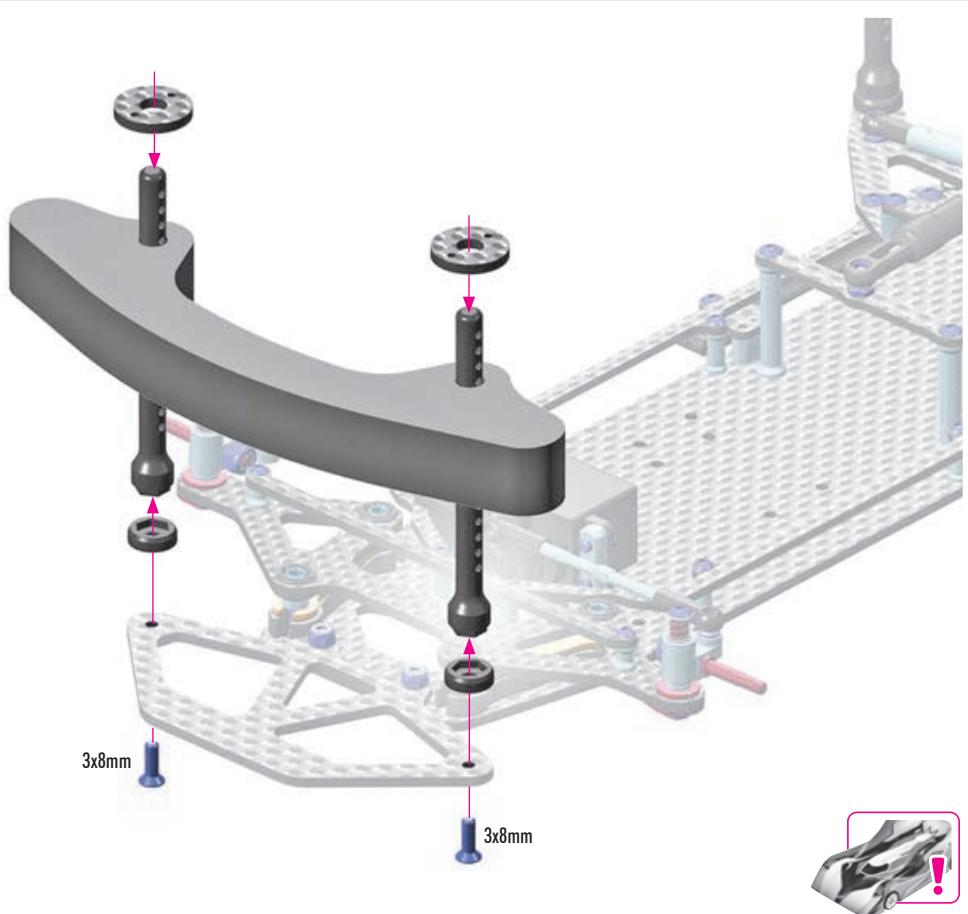

2x **X10**

2x **XP10**

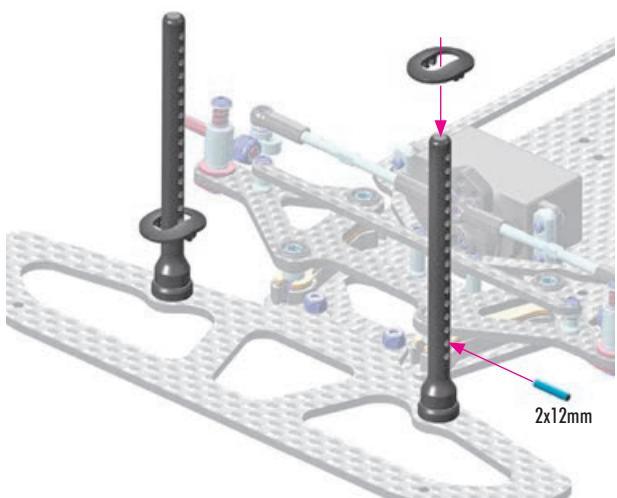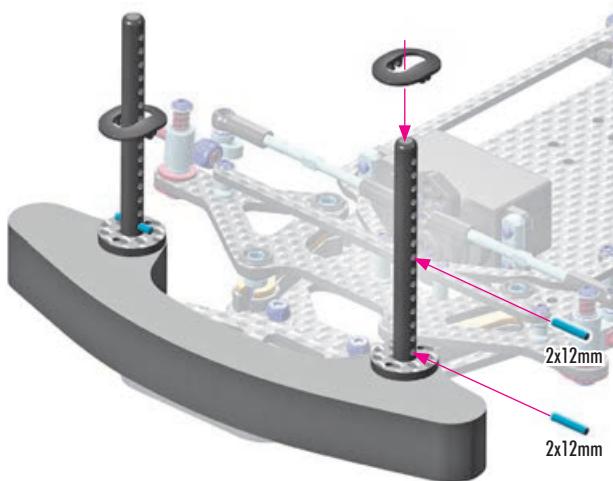

5. FINAL ASSEMBLY

2x 902308
SH M3x8

ALU PINION GEARS

OPTION	ALU PINION GEARS
#305968	18T / 64P OPTION
#305969	19T / 64P OPTION
#305970	20T / 64P OPTION
#305971	21T / 64P OPTION
#305972	22T / 64P OPTION
#305973	23T / 64P OPTION
#305974	24T / 64P OPTION
#305975	25T / 64P OPTION
#305976	26T / 64P OPTION
#305977	27T / 64P OPTION
#294128	28T / 64P OPTION
#305979	29T / 64P OPTION
#294130	30T / 64P OPTION
#294131	31T / 64P OPTION
#305982	32T / 64P OPTION
#294133	33T / 64P OPTION
#305984	34T / 64P OPTION
#305985	35T / 64P OPTION
#294136	36T / 64P OPTION
#294137	37T / 64P OPTION
#294138	38T / 64P OPTION
#294139	39T / 64P OPTION
#294140	40T / 64P OPTION
#294141	41T / 64P OPTION
#294142	42T / 64P OPTION
#294143	43T / 64P OPTION
#294144	44T / 64P OPTION
#294145	45T / 64P OPTION
#305996	46T / 64P OPTION
#294147	47T / 64P OPTION
#294148	48T / 64P OPTION
#294149	49T / 64P OPTION
#294150	50T / 64P OPTION
#294152	52T / 64P OPTION
#294154	54T / 64P OPTION
#294156	56T / 64P OPTION
#294158	58T / 64P OPTION
#294160	60T / 64P OPTION

GEAR MESH

Adjust the gear mesh so there is appropriate space between the spur gear and pinion teeth. There should be a very small amount of free play.

ALTERNATIVE BATTERY TYPE:

- SHORT PACK
- MID SIZE

There are two configurations for the battery backstops depending on the pack size.

MID SIZE (NOT INCLUDED)

SHORT PACK (NOT INCLUDED)

Battery back stop position for SHORT Battery Pack

3x5mm

Battery back stop position for MID SIZE Battery Pack

BATTERY BACKSTOP

The adjustable battery backstop system secures the battery in the car in a tweak-free, non-fixed manner to help improve traction and makes it more stable and easier to drive.

It is very important that battery has a very small amount of play in all directions so it does NOT tweak the car, but the play cannot be too much otherwise the battery may fall out in crashes.


Adjust the shim thickness to match battery pack height. If there is no play between the backstop and pack, use a thicker shim. If it is too loose, use a thinner shim to reduce the gap.

Make sure to have a small amount of play

5. FINAL ASSEMBLY



1x 903308
SFH M3x8

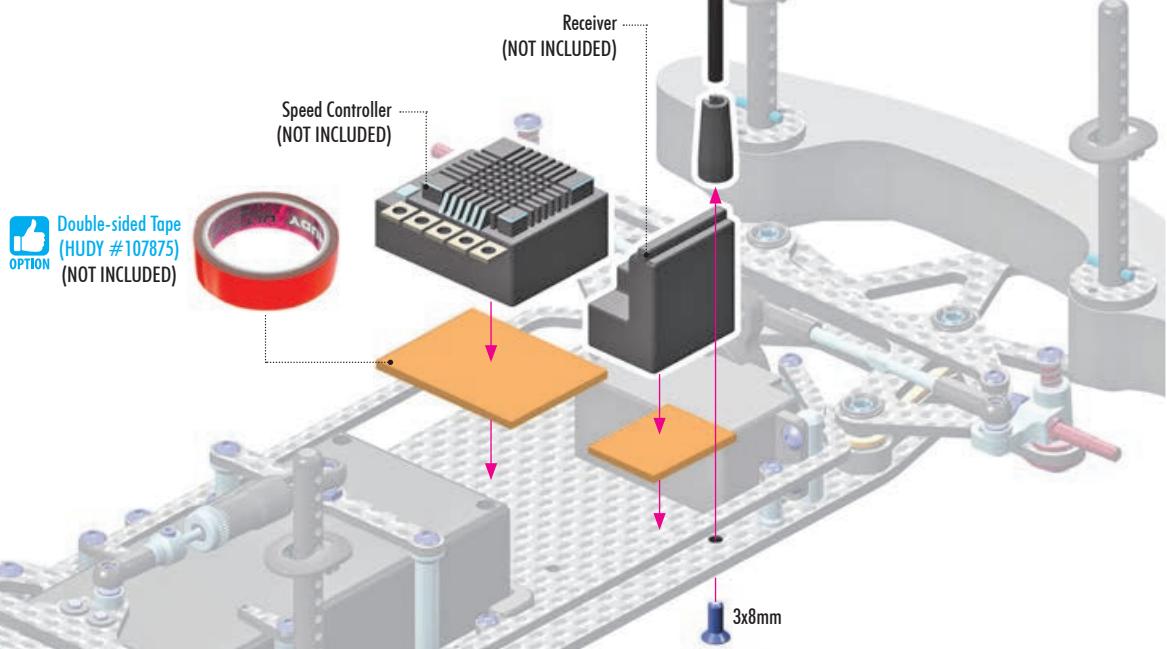

2x 372290
SHIM 3.2x4.8x0.5




8x 375390
ALU SCH M3x8



4x 951851
BB 1/8"x5/16"x9/64"



2x 960030
N M3

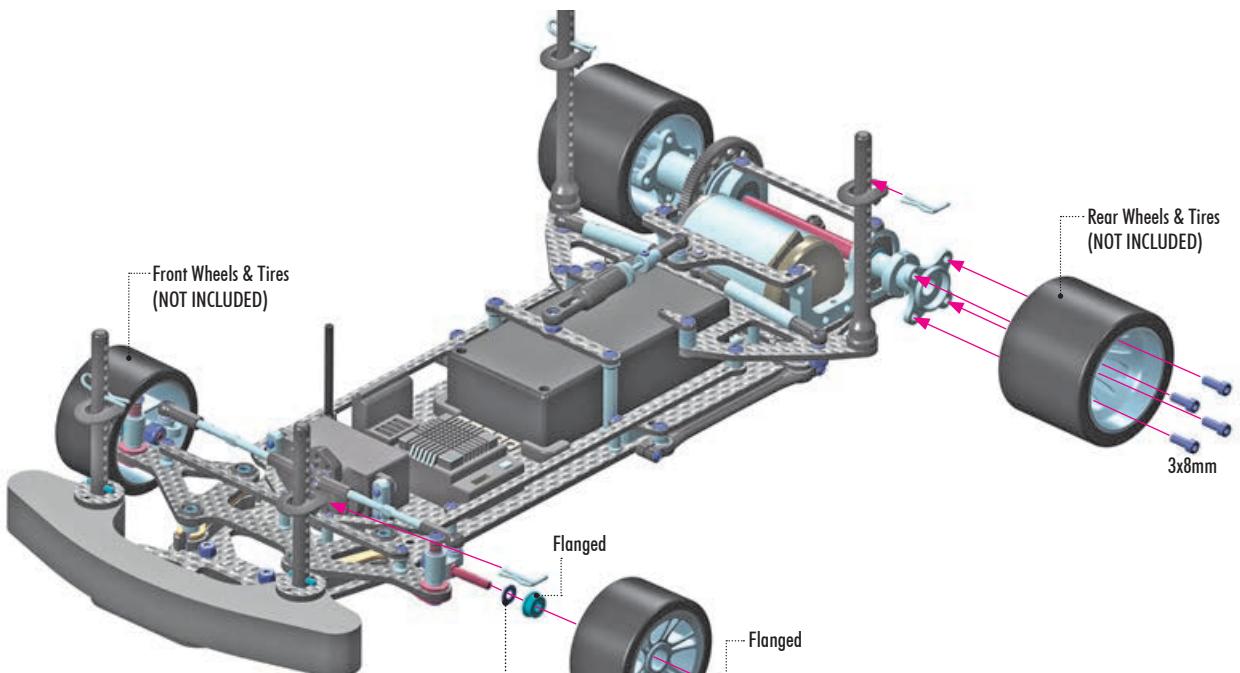

FRONT TRACK-WIDTH
The shim behind the wheel bearing affects the front track-width.

WIDER TRACK-WIDTH
Easier to drive, less steering, less responsive.

NARROWER TRACK-WIDTH
More steering, more responsive, but more difficult to drive.

Flanged
M3
Gently tighten the wheel nuts so the wheel turns freely, but without excessive axial play.

www.teamxray.com

XRAY EUROPE

XRAY, K VÝSTAVISKU 6992, 91101 TRENCIN, SLOVAKIA, EUROPE
PHONE: +421-32-740 11 00, FAX: +421-32-740 11 09, info@teamxray.com

XRAY USA

RC AMERICA, 2030 Century Center Blvd #15, Irving, TX 75062, USA
PHONE: 214-744-2400, FAX: 214-744-2401, xray@rcamerica.com



/TeamXray



/TeamXray



/TeamXray



/XrayRacing



/+TeamXrayRC